



GEORE  
8250-200  
AUSTRIA



Schneide induktiv  
gehärtet  
Härte: 62-64HRC

VDE 8250 - 200 H

1000 V 10

GEORE  
8250-200  
AUSTRIA



# VDE INSULATED SAFETY TOOLS



++ VDE SPECIAL PURPOSE USE

++ UP TO 1000 V



SERVICE / FEATURES		502 - 503
VDE SPANNERS		504
VDE TORQUE WRENCHES		504
VDE SOCKETS + ACCESSORIES		505
VDE SCREWDRIVER		506
VDE PLIERS		506 - 511
VDE ASSORTMENTS		511 - 514
VDE TOOL CABINET		513
VDE ACCESSORIES		514 - 515



Sheath-stripping, wire-stripping, crimping tools etc. can be found on pages 332 - 339





# ++ VDE INSULATED SAFETY TOOLS



- Only tools bearing this test mark are classed as insulated tools
- VDE insulation: insulated up to 1000 V acc. to EN 60900 / IEC 60900:2004
- Safe working in high-voltage areas
- Up to 1000 V AC (alternating current)
- Up to 1500 V DC (direct current)

**1000 V**



- The GS symbol is a symbol defined in the law on technical equipment and consumer products (German Equipment and Product Safety Act/GSPG). It may only be used with the name given of the testing and certification office.



- The VDE symbol points to the VDE Test Institute as having carried out the test. As a result, GEDORE and the VDE Test Institute vouch for the fulfilment of the tool and safety standards and thus meet the requirements of the German equipment safety law.



- Tools marked with the double triangle are individually tested = testing at 10000 V AC based on EN 60900 / IEC 60900:2004



**Note:**

- ⚡ and 1000 V particulars in association with the GEDORE log point to a tool tested and insulated by GEDORE.
- Texts: All DIN EN 60900-tested tools must be marked with the manufacturer's name, model or type designation, the year of manufacture and the double triangle lightning symbol with the 1000 V detail.

## VDE REGULATIONS / TEST SPECIFICATIONS

- All GEDORE VDE safety tools - given their proper use - are manufactured to dependably protect the user from any electrical shock currents.
- For this to be ensured, major testing steps up to a 100% testing of the electrical insulating property at the 10000 V high-voltage test facility are prescribed.
- With the test passed, GEDORE VDE-tools then have a 10-fold safety from electrical shock currents and are approved of for working under voltages up to AC 1000 V and DC 1500.
- For these properties to be realized a host of requirements must be adhered to. They are listed in DIN EN 60900:2004. They include:




**Note:**


- All mechanical requirements such as hardness, torque and forces must comply with the DIN-ISO tolerances.
- To ensure the high safety standard of the insulated GEDORE VDE tools, independent, authorised testing centres, such as the VDE association, carry out both type examinations as well as manufacturing and storage inspections.




**Voltage test**  
 - No electric breakdown  
 - Leakage current below the norm  
 - No electric flashover




**Shock test**  
 - No flaking  
 - No cracks  
 - No fractures




**Bonding test**  
 - No detaching of the insulation



**Penetration test**  
 - No electric flashover  
 - No electric breakdown  
 - No detaching of the insulation



**Burning behavior test**  
 - Flame height below the norm





## + VDE CHECK-TOOL INSULATION ++

▲ 1000

Only tools with this test mark are considered to be fully safe.

D'E GS

The two-ply Check-Tool insulation

- All GEDORE VDE soft-plastic insulated safety tools have the Check-Tool insulation.
- The two-colour multi-layer insulation - red on the outside, yellow on the inside - complies with the BGV A3 (VBG-4) regulation.
- The tool must not show any discernable damage.
- For technical reasons, Check-Tool insulation cannot be applied on tools with sprayed insulation.

## → SAFETY NOTES

- Work on electrically live equipment must be carried out only by trained electricians!
- Only tools and safety equipment marked with the double triangle or bell 1000 V symbol (refer to BGV A3) must be used.
- Before commencing any work, check the insulation for damage.
- Damaged tools must not be used!
- The regulations of the employers' liability insurance associations and power supply companies must be complied with!
- GEDORE VDE tools are approved for work on live circuits at voltages up to 1000 V AC and 1500 V DC.
- Tools must not be combined unless they are designed to be securely joined together.

## i VDE ACCESSORIES

- Some items in our VDE accessories range are marked with the usual test mark for protective equipment.



## VDE SPANNERS

### VDE 2 E

#### VDE SINGLE ENDED RING SPANNER deep offset

- GEDORE vanadium steel 31CrV3
- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation



Code	No.	Ø mm	l mm	l <sub>1</sub> mm	l <sub>2</sub> mm	l <sub>3</sub> mm
6035890	<b>VDE 2 E 8</b>	8	170	61	1	
6035970	<b>VDE 2 E 9</b>	9	170	74	1	
6036000	<b>VDE 2 E 10</b>	10	170	97	1	
6036190	<b>VDE 2 E 11</b>	11	180	93	1	
6036270	<b>VDE 2 E 12</b>	12	190	147	1	
6036350	<b>VDE 2 E 13</b>	13	190	130	1	
6036430	<b>VDE 2 E 14</b>	14	210	151	1	
6036510	<b>VDE 2 E 15</b>	15	215	155	1	
6036780	<b>VDE 2 E 17</b>	17	220	199	1	
6036860	<b>VDE 2 E 19</b>	19	240	244	1	
6036940	<b>VDE 2 E 22</b>	22	260	319	1	
6037080	<b>VDE 2 E 24</b>	24	280	446	1	
6037160	<b>VDE 2 E 27</b>	27	295	506	1	
6037240	<b>VDE 2 E 30</b>	30	310	592	1	
6037320	<b>VDE 2 E 32</b>	32	330	683	1	

### VDE 894

#### VDE SINGLE OPEN ENDED SPANNER

- GEDORE vanadium steel 31CrV3
- With VDE insulation as per EN 60900 / IEC 60900:2004
- Jaw set at 15°



Code	No.	Ø mm	l mm	l <sub>1</sub> mm	l <sub>2</sub> mm
6572040	<b>VDE 894 9</b>	9	105	30	1
6572120	<b>VDE 894 10</b>	10	105	34	1
6572200	<b>VDE 894 11</b>	11	115	44	1
6572390	<b>VDE 894 12</b>	12	125	52	1
6572470	<b>VDE 894 13</b>	13	135	67	1
6572550	<b>VDE 894 14</b>	14	145	81	1
6572630	<b>VDE 894 15</b>	15	150	93	1
6572710	<b>VDE 894 16</b>	16	155	108	1
6572980	<b>VDE 894 17</b>	17	160	117	1
6573010	<b>VDE 894 19</b>	19	175	161	1
6573280	<b>VDE 894 22</b>	22	200	210	1
6573360	<b>VDE 894 24</b>	24	220	268	1
6573440	<b>VDE 894 27</b>	27	245	396	1
6573520	<b>VDE 894 30</b>	30	265	486	1
6574920	<b>VDE 894 32</b>	32	280	558	1

### V 60 CP

#### ADJUSTABLE WRENCH open end, 1000 V

- Chrome-plated
- Dip-insulated up to 1000 V
- Not certified acc. to VDE



△ 1000 V

Code	No.	Size "	mm	l mm	l <sub>1</sub> mm
2179040	<b>V 60 CP 6</b>	6	20	170	1
2179059	<b>V 60 CP 8</b>	8	25	330	1
2179067	<b>V 60 CP 10</b>	10	30	520	1
2179075	<b>V 60 CP 12</b>	12	36	880	1

### VDE 2133

#### VDE SOCKET WRENCH with 3C-handle

- With hanging hole
- Head depth 25 mm, blade length 125 mm
- GEDORE vanadium steel 31CrV3
- With VDE insulation up to 1000 V, as per EN 60900 / IEC 60900:2004



Code	No.	Ø mm	l mm	l <sub>1</sub> mm	Head Ø	l <sub>2</sub> mm	l <sub>3</sub> mm
1747045	<b>VDE 2133 3</b>	3	125	225	9	95	1
1747053	<b>VDE 2133 4</b>	4	125	225	10	97	1
1747061	<b>VDE 2133 5</b>	5	125	225	11	98	1
1747088	<b>VDE 2133 6</b>	6	125	225	12	100	1
1747096	<b>VDE 2133 7</b>	7	125	235	14	134	1
1747118	<b>VDE 2133 8</b>	8	125	235	15	136	1
1747126	<b>VDE 2133 9</b>	9	125	235	16	136	1
1747134	<b>VDE 2133 10</b>	10	125	235	17	143	1
1747142	<b>VDE 2133 11</b>	11	125	245	19	173	1
1747150	<b>VDE 2133 12</b>	12	125	245	20	176	1
1747169	<b>VDE 2133 13</b>	13	125	245	21	179	1
1747177	<b>VDE 2133 14</b>	14	125	245	22	178	1
1747185	<b>VDE 2133 17</b>	17	125	245	26	202	1

## VDE TORQUE WRENCHES

### VDE 4507

#### VDE TORQUE WRENCH 1/2" 5-50 N-m / 4-37 lbf-ft

- Automatic short-way release and acoustic signal
- Manually adjustable dual scale with metric and SAE values
- Fine toothed ratchet with square drive as per DIN 3120 - A 12.5, ISO 1174
- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation

12.5

1/2"



Code	No.	Size "	mm	l mm	l <sub>1</sub> mm	l <sub>2</sub> mm
6681920	<b>VDE 4507-4</b>	1/2	12.5	370	1251	1





## VDE SOCKETS + ACCESSORIES


### VDE 19

#### VDE SOCKET 1/2"

- Hexagon socket wrench, hand-operated
- With square drive according to DIN 3120 - C 12.5, ISO 1174
- GEDORE vanadium steel 31CrV3
- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation
- 10-12 mm insulation overhang must be added to the lengths stated
- Sizes 27, 30 and 32: diameter  $d_1$  is not standardised

12.5

1/2"



Code	No.	Ø mm	$d_1$	$d_2$	L	↕	☒
6122510	<b>VDE 19 10</b>	10	19.5	27	54.0	70	1
6122780	<b>VDE 19 11</b>	11	20.7	27	54.0	67	1
6122860	<b>VDE 19 12</b>	12	22.0	27	54.0	70	1
6122940	<b>VDE 19 13</b>	13	23.2	27	54.0	69	1
6123080	<b>VDE 19 14</b>	14	24.5	27	54.0	73	1
6123160	<b>VDE 19 15</b>	15	25.7	27	55.5	88	1
1439294	<b>VDE 19 16</b>	16	27.0	27	55.5	86	1
6123240	<b>VDE 19 17</b>	17	28.2	27	55.5	84	1
6123320	<b>VDE 19 19</b>	19	30.7	27	56.0	92	1
6123400	<b>VDE 19 22</b>	22	34.5	27	57.5	121	1
6123590	<b>VDE 19 24</b>	24	37.0	27	57.5	146	1
6123670	<b>VDE 19 27</b>	27	40.7	27	57.5	174	1
6123750	<b>VDE 19 30</b>	30	44.5	27	59.0	212	1
6123830	<b>VDE 19 32</b>	32	47.0	27	60.5	250	1

### VDE IN 19

#### VDE SCREWDRIVER BIT SOCKET 1/2" for in-hex screws

- With pressed-in pin
- With square drive according to DIN 3120 - C 12.5, with ball groove
- Tips GEDORE vanadium special steel
- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation
- Sockets can only be combined with VDE 1989 T, VDE 1991, VDE 1993 U and VDE 4507

12.5

1/2"



Code	No.	Ø mm	l mm	Ø	↕	☒
6124480	<b>VDE IN 19 5</b>	5	106	27	83	1
6124560	<b>VDE IN 19 6</b>	6	106	27	95	1
6124640	<b>VDE IN 19 8</b>	8	106	27	109	1

### VDE 1990

#### VDE EXTENSION 1/2"

- For hand-operated sockets with square drive as per DIN 3120, ISO 1174
- With lock screw for holding the socket wrenches
- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation
- Not suited for use with VDE IN 19
- 10-12 mm insulation overhang must be added to the lengths stated

12.5

1/2"



Code	No.	Ø mm	l mm	↕	☒	
6124050	<b>VDE 1990-5</b>	1/2	12.5	125	213	1
6124130	<b>VDE 1990-10</b>	1/2	12.5	250	411	1

### VDE 1991

#### VDE EXTENSION 1/2"

- With hollow shaft, especially suitable for screwdriver bit sockets VDE IN 19
- Max. torque 370 N-m
- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation

12.5

1/2"



Code	No.	Ø mm	l mm	↕	☒	
1507516	<b>VDE 1991</b>	1/2	12.5	125	204	5

### VDE 1988 - VDE 1989 T

#### VDE T-HANDLE for 1/2" VDE tools

- With VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation
- VDE 1988 with screw locking, not suited for use with VDE IN 19
- VDE 1989 T with pull locking

12.5

1/2"



Code	No.	Ø mm	l mm	↕	☒	
6124210	<b>VDE 1988</b>	1/2	12.5	200	455	1
6124720	<b>VDE 1989 T</b>	1/2	12.5	200	355	1

### VDE 1993 U

#### VDE REVERSIBLE RATCHET 1/2" with push-button release

- Robust, with smooth action
- Sockets held absolutely securely by push-button lock with ball in the square drive
- Direction changed by 2 push-buttons, marked R and L, on the shaft
- Square drive acc. to DIN 3120 - A 12.5, ISO 1174, chrome-vanadium steel 31CrV3
- With VDE insulation acc. to EN 60900 / IEC 60900:2004

12.5

1/2"




Code	No.	Ø mm	l mm	↕	☒	
6123910	<b>VDE 1993 U</b>	1/2	12.5	270	546	1

### VDE 42

#### VDE HEXAGON ALLEN KEY for in-hex screws

- Acc. to DIN ISO 2936
- Particularly suitable for cable branch clamping rings
- Oil-hardened
- GEDORE vanadium special steel
- With VDE insulation up to 1000 V, as per EN 60900 / IEC 60900:2004



1000 V



Code	No.	Ø mm	L <sub>1</sub>	L <sub>2</sub>	↕	☒
2324849	<b>VDE 42 3</b>	3	130	23.5		1
2324857	<b>VDE 42 4</b>	4	120	40.0		1
2324865	<b>VDE 42 5</b>	5	140	48.0		1
2324873	<b>VDE 42 6</b>	6	140	48.0		1
2324881	<b>VDE 42 8</b>	8	150	51.0		1
2324903	<b>VDE 42 10</b>	10	220	51.0		1
2324911	<b>VDE 42 12</b>	12	260	61.5		1

**VDE SCREWDRIVER**

**VDE 2170**

**VDE SCREWDRIVER for slotted head screws**

- With VDE insulation as per EN 60900 / IEC 60900:2004, fully insulated blade
- Blade tip to DIN ISO 2380-1 form A
- With impact resistant handle
- Blade in chrome-vanadium steel, with black tip



Code	No.	mm±	mm±	mm	mm	mm	mm
1612220	<b>VDE 2170 2,5</b>	0.4	2.5	75	155	29	10
1612239	<b>VDE 2170 3</b>	0.5	3.0	100	180	33	10
1612247	<b>VDE 2170 3,5</b>	0.6	3.5	100	190	46	10
1612255	<b>VDE 2170 4</b>	0.8	4.0	100	190	49	10
1612271	<b>VDE 2170 5,5</b>	1.0	5.5	125	225	81	10
1612298	<b>VDE 2170 6,5</b>	1.2	6.5	150	260	116	10
1612301	<b>VDE 2170 8</b>	1.2	8.0	175	195	158	10
1612336	<b>VDE 2170 10</b>	1.6	10.0	200	320	188	10

**VDE 2160 PH**

**VDE SCREWDRIVER for cross-slotted head screws PH**

- With VDE insulation as per EN 60900 / IEC 60900:2004, fully insulated blade
- Blade tip to DIN ISO 8764-1 PH
- With impact-resistant handle
- Blade in chrome-vanadium steel, with black tip



Code	No.	PH	mm	mm	mm	mm
1612107	<b>VDE 2160 PH 0</b>	0	M1,6 - M2	60	140	30
1612115	<b>VDE 2160 PH 1</b>	1	M2 - M3	80	180	68
1612123	<b>VDE 2160 PH 2</b>	2	M3,5 - M5	100	210	101
1612131	<b>VDE 2160 PH 3</b>	3	M5,5 - M7	150	270	168
1612158	<b>VDE 2160 PH 4</b>	4	M8 - M10	200	320	249

**VDE 2160 PZ**

**VDE SCREWDRIVER for cross-slotted head screws PZ**

- With VDE insulation as per EN 60900 / IEC 60900:2004, fully insulated blade
- Blade tip to DIN ISO 8764-1 PZ
- With impact-resistant handle
- Blade in chrome-vanadium steel, with black tip



Code	No.	PZ	mm	mm	mm	mm
1612166	<b>VDE 2160 PZ 0</b>	0	M1,6 - M2	60	140	29
1612182	<b>VDE 2160 PZ 1</b>	1	M2 - M3	80	180	68
1612190	<b>VDE 2160 PZ 2</b>	2	M3,5 - M5	100	210	102
1612204	<b>VDE 2160 PZ 3</b>	3	M5,5 - M7	150	270	168
1612212	<b>VDE 2160 PZ 4</b>	4	M8 - M10	200	320	250

**VDE 2170-2160 PH-077**

**VDE SCREWDRIVER SET 7 pieces**

- Packed in environmentally-friendly cardboard box
- For slotted and cross-slotted head screws PH
- With VDE insulation as per EN 60900 / IEC 60900:2004, fully insulated blade
- With impact-resistant handle




Code	No.	Contents	mm	mm
1616048	<b>VDE 2170-2160 PH-077</b>	⊖ VDE 2170 2,5 4 5,5 6,5 ⊕ VDE 2160 PH 0 1 2	575	1

**V 4614 PLUS**

**VOLTAGE TESTER 1000 V two-pole with LED display**

- For 6-1000 V AC
- Optical warning of life-threatening voltage above 35 V
- Acoustic and visual continuity testing from 0 to 500 kΩ
- Phase testing > 100 V AC
- Phase sequence indicator
- RCD triggering by automatic load function, Is~30mA, ED (DT) = max. 30 sec.
- Safety outlet and CEE one-hand operation
- Removable 4 mm tip adaptor
- Undetachable test tip protection
- Protection classification IP65, dust-proof, hose-proof
- Integrated LED torch (white)
- 2x batteries type AAA Micro
- Automatic on/off function
- CAT IV 1000 V
- TÜV/GS tested and approved, IEC/EN 61243-3, DIN VDE 0682 Part 401

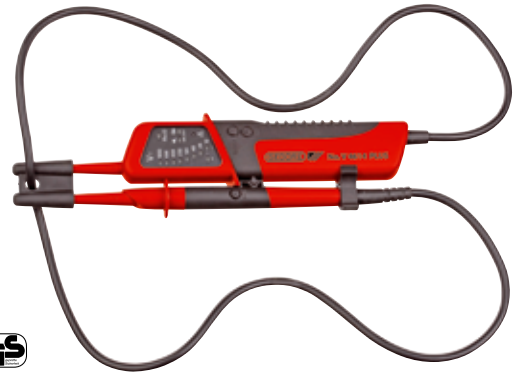


Code	No.	mm	mm
2241137	<b>V 4614 PLUS</b>	270	1

**VDE PLIERS**

**180**

**CABLE SHEARS**

- Cuts cable up to 27 mm, solid material up to 200 mm<sup>2</sup>
- Not certified acc. to VDE




Code	No.	mm	mm
6430330	<b>180 23</b>	620	2125

**V 8091**

**CABLE CUTTER**

- For cutting copper and aluminium cables
- Genuine single-hand operation, with optimum transfer of force. Handles ergonomically designed for fatigue-free constant use. Little hand pressure required even at maximum loading. For step-by-step cutting with burr-free cut, may be opened in every cutting position. With locking lever.
- Tool body in high-tensile special steel
- Cutting edges and important functional parts tempered or specially hardened
- Red plastic handles insulated
- Suitable for use up to 1000 V
- Not certified acc. to VDE
- V 8091-320: single-strand cable, max. Ø 25 mm (1"), multi-strand cable, max. Ø 32 mm (1.1/4")
- V 8091-500: multi-strand cable, max. Ø 52 mm (2.1/32")



Code	No.	mm	mm
6725130	<b>V 8091-320</b>	280	792
6725210	<b>V 8091-500</b>	280	999

### VDE 8094

#### VDE CABLE SHEARS with VDE dipped insulation

- For cutting multi-strand copper and aluminium cables up to Ø 20 mm
- Up to Ø 25 mm with first and second cut
- Cutting edges additionally inductively hardened
- Precision ground for a clean and new cutting-edge geometry
- With adjustable screw joint and finger protection
- Not suitable for steel wire or hard-drawn copper wire
- Special tool steel, forged, gun-metal finish
- Handles with VDE insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation



Code	No.	Ø	Cable cross section	↳mm↳	↳inch↳	↕	↕
6725050	<b>VDE 8094</b>	20	70	200	8.1/2	423	1

### VDE 8099

#### VDE STRIPPING PLIERS STRIP-FIX with VDE dipped insulation

- Self-adjusting, for wires 0.5-5.0 mm<sup>2</sup>
- GEDORE special hardened and tempered steel, oil-hardened, chrome-plated
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation
- E-8099 = Pair of spare knives




Code	No.	↳mm↳	↳inch↳	Cable cross section	↕	↕
6709600	<b>VDE 8099-160</b>	160	6.1/2	0,5-5	226	1
5709580	<b>E-8099</b>				12	1

### VDE 8098

#### VDE STRIPPING PLIERS with VDE dipped insulation

- Opening stop, spring and brass adjusting screw for wires 0.8 - 6.0 mm<sup>2</sup>
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation



Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	Cable cross section	↕	↕
6708980	<b>VDE 8098-160</b>	160	43.5	18.5	8.5	0,8-6	217	1


### VDE 8099 H

#### VDE STRIPPING PLIERS STRIP-FIX with VDE insulating sleeves

- Self-adjusting, for wires 0.5-5.0 mm<sup>2</sup>
- GEDORE special hardened and tempered steel, oil-hardened, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004





Code	No.	↳mm↳	↳inch↳	Cable cross section	↕	↕
1552082	<b>VDE 8099-160 H</b>	160	6.1/2	0,5-5	211	1

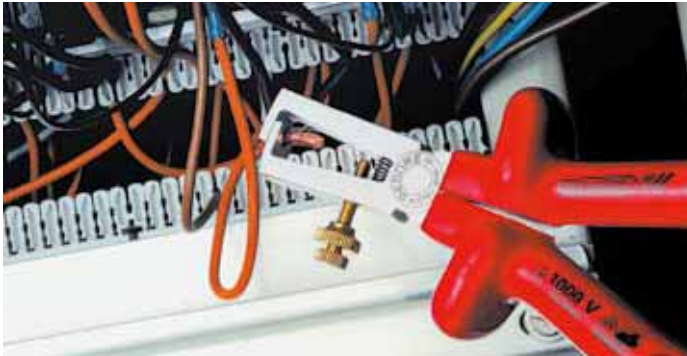

### VDE 8098 H

#### VDE STRIPPING PLIERS with VDE insulating sleeves

- Opening stop, spring and brass adjusting screw for wires 0.8 - 6.0 mm<sup>2</sup>
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004

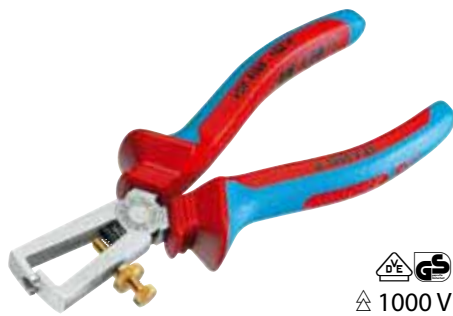

Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	Cable cross section	↕	↕
1552074	<b>VDE 8098-160 H</b>	160	43.5	18.5	8.5	0,8-6	204	1

### VDE 146

#### VDE UNIVERSAL PLIERS 7 settings

- Gripping pliers with safety box joint and finger protection
- GEDORE special chrome-vanadium steel
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation




Code	No.	↳mm↳	mm	↕	↕
6120140	<b>VDE 146 10</b>	250	31	485	1



**VDE 8250**

**VDE HEAVY DUTY COMBINATION PLIERS with VDE dipped insulation**

- ▶ Induction-hardened precision cutting edges, hardness 62-64 HRC, for all wire types
- ▶ For heavy continuous use
- ▶ GEDORE special hardened and tempered steel, chrome-plated
- ▶ Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	∅	↕	⊞
1429582	<b>VDE 8250-160</b>	160	35.0	22.8	5.8	10.4	236	1	
6720090	<b>VDE 8250-180</b>	180	38.5	25.6	6.5	11.0	312	1	
6720250	<b>VDE 8250-200</b>	200	39.5	27.0	6.5	12.4	365	1	
6720330	<b>VDE 8250-225</b>	225	42.2	27.7	6.5	13.0	485	1	

**VDE 8250 H**

**VDE HEAVY DUTY COMBINATION PLIERS with VDE insulating sleeves**

- ▶ Induction-hardened precision cutting edges, hardness 62-64 HRC, for all wire types
- ▶ For heavy continuous use
- ▶ GEDORE special hardened and tempered steel, chrome-plated
- ▶ Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	∅	↕	⊞
1550942	<b>VDE 8250-160 H</b>	160	35.0	22.8	5.8	10.4	228	1	
1550950	<b>VDE 8250-180 H</b>	180	38.5	25.6	6.5	11.0	288	1	
1550969	<b>VDE 8250-200 H</b>	200	39.5	27.0	6.5	12.4	369	1	



**VDE 8314**

**VDE SIDE CUTTER with VDE dipped insulation**

- ▶ For medium-hard and hard wire
- ▶ Induction-hardened precision cutting edges, hardness 63-65 HRC
- ▶ GEDORE special hardened and tempered steel, chrome-plated
- ▶ Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	∅	↕	⊞
6743540	<b>VDE 8314-140</b>	140	18.5	18.5	9.5	1.6	199	1
6743620	<b>VDE 8314-160</b>	160	19.0	22.0	10.0	1.6	253	1

**VDE 8314 H**

**VDE SIDE CUTTER with VDE insulating sleeves**

- ▶ For medium-hard and hard wire
- ▶ Induction-hardened precision cutting edges, hardness 63-65 HRC
- ▶ GEDORE special hardened and tempered steel, chrome-plated
- ▶ Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	∅	↕	⊞
1552155	<b>VDE 8314-140 H</b>	140	18.5	18.5	9.5	1.6	177	1
1552163	<b>VDE 8314-160 H</b>	160	19.0	22.0	10.0	1.6	231	1

**VDE 8315 H**

**VDE ELECTRICIANS' SIDE CUTTER with VDE insulating sleeves**

- ▶ Double-function electricians' side cutters for cutting and wire stripping
- ▶ Stripping holes for single or multi-strand conductors 1.5 and 2.5 mm<sup>2</sup>
- ▶ Induction-hardened precision cutting edges
- ▶ GEDORE special hardened and tempered steel, chrome-plated
- ▶ Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	Cable cross section	∅	↕	⊞
1742582	<b>VDE 8315-160 H</b>	160	19	22	10	1,5 / 2,5	1,6	231	1

**VDE 8316**

**VDE POWER SIDE CUTTER with VDE dipped insulation**

- ▶ For hard wire, including piano wire
- ▶ Induction-hardened precision cutting edges, hardness 63-65 HRC
- ▶ GEDORE special hardened and tempered steel, chrome-plated
- ▶ Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation





Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	∅	↕	⊞
1429590	<b>VDE 8316-180</b>	180	22.6	26	11	1,8	285	1
6742570	<b>VDE 8316-200</b>	200	22.0	28	11	2,0	341	1

**VDE 8367**

**VDE HEAVY DUTY END CUTTING NIPPERS**

- ▶ Good lever action for easy cutting
- ▶ Induction-hardened precision cutting edges, hardness 63-65 HRC
- ▶ For all wires including piano wire
- ▶ GEDORE special hardened and tempered steel, drop-forged, oil-hardened and annealed
- ▶ Handles with VDE insulated up to 1000 V, acc. to EN 60900 / IEC 60900:2004, dipped insulation: two-ply Check-Tool insulation

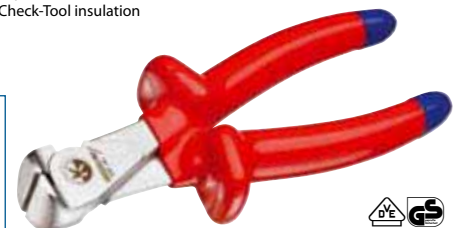


Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	∅	↕	⊞
2324830	<b>VDE 8367-160</b>	160	6.9	27	23.5	1,6	220	1



### VDE 8316 H

#### VDE POWER SIDE CUTTER with VDE insulating sleeves

- For hard wire, including piano wire
- Induction-hardened precision cutting edges, hardness 63-65 HRC
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	T <sub>1</sub>	Ø	↔	⊞
1550993	<b>VDE 8316-180 H</b>	180	22.6	26	11	1,8	267	1
1551000	<b>VDE 8316-200 H</b>	200	22.0	28	11	2,0	344	1

### VDE 8122

#### VDE ROUND NOSE PLIERS with VDE dipped insulation

- Long, round jaws and serrated gripping surfaces
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	D <sub>1</sub>	T <sub>1</sub>	↔	⊞
6717110	<b>VDE 8122-160</b>	160	48	16.5	2.5	8.7	170	1

### VDE 8120

#### VDE FLAT NOSE PLIERS with VDE dipped insulation

- Long, flat jaws and serrated gripping surfaces
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation





Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	↔	⊞
6715330	<b>VDE 8120-160</b>	160	51	16.5	3.4	9	185	1

### VDE 8122 H

#### VDE ROUND NOSE PLIERS with VDE insulating sleeves

- Long, round jaws and serrated gripping surfaces
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004

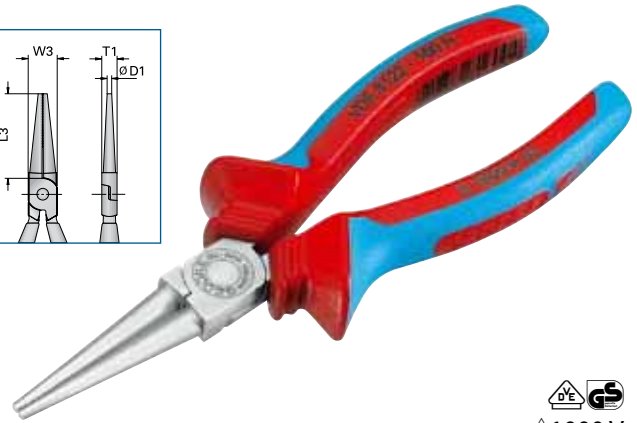


Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	D <sub>1</sub>	T <sub>1</sub>	↔	⊞
1552104	<b>VDE 8122-160 H</b>	160	48	16.5	2.5	8.7	154	1

### VDE 8120 H

#### VDE FLAT NOSE PLIERS with VDE insulating sleeves

- Long, flat jaws and serrated gripping surfaces
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	↔	⊞
1552090	<b>VDE 8120-160 H</b>	160	51	16.5	3.4	9	175	1

### VDE 8132

#### VDE NEEDLE NOSE PLIERS with VDE dipped insulation, straight pattern

- Long, flat-round jaws, straight gripping surfaces
- Induction-hardened precision cutting edges, hardness 61-63 HRC
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation




Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	T <sub>2</sub>	↔	⊞
6721570	<b>VDE 8132-160</b>	160	50.0	16.5	3.2	9.0	2.5	193	1
6721650	<b>VDE 8132-200</b>	200	75.7	18.5	3.7	9.5	2.8	248	1

**VDE 8132 H**

**VDE NEEDLE NOSE**

**PLIERS with VDE insulating sleeves, straight pattern**

- Long, flat-round jaws, straight gripping surfaces
- Induction-hardened precision cutting edges, hardness 61-63 HRC
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004



**1000 V**


Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	T <sub>2</sub>		
1552112	<b>VDE 8132-160 H</b>	160	50.0	16.5	3.2	9.0	2.5	164	1
1552120	<b>VDE 8132-200 H</b>	200	75.7	18.5	3.7	9.5	2.8	235	1

**VDE 8132 AB**

**VDE NEEDLE NOSE**

**PLIERS with VDE dipped insulation, angled pattern**

- Long, flat-round jaws, angled gripping surfaces
- Induction-hardened precision cutting edges, hardness 61-63 HRC
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation



**1000 V**


Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	T <sub>2</sub>		
6721730	<b>VDE 8132 AB-160</b>	160	46.0	16.5	3.2	9.0	2.5	177	1
6721810	<b>VDE 8132 AB-200</b>	200	70.5	18.5	3.7	9.5	2.8	252	1

**VDE 8132 AB H**

**VDE NEEDLE NOSE**

**PLIERS with VDE insulating sleeves, angled pattern**

- Long, flat-round jaws, angled gripping surfaces
- Induction-hardened precision cutting edges, hardness 61-63 HRC
- GEDORE special hardened and tempered steel, chrome-plated
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004



**1000 V**

Code	No.	L	L <sub>3</sub>	W <sub>3</sub>	W <sub>4</sub>	T <sub>1</sub>	T <sub>2</sub>		
1552139	<b>VDE 8132 AB-160 H</b>	160	46.0	16.5	3.2	9.0	2.5	173	1
1552147	<b>VDE 8132 AB-200 H</b>	200	70.5	18.5	3.7	9.5	2.8	235	1

**VDE S 8003**

**VDE PLIERS SET WITH VDE DIPPED INSULATION 3 pieces**

- Packed in environmentally-friendly cardboard box
- Handles with VDE dipped insulation as per EN 60900 / IEC 60900:2004, two-ply Check-Tool insulation



**1000 V**

Code	No.	Contents		
6708120	<b>VDE S 8003</b>	<b>VDE 8132-160</b> <b>VDE 8250-180</b> <b>VDE 8314-160</b>	760	1

**VDE S 8003 H**

**VDE PLIERS SET WITH VDE INSULATING SLEEVES 3 pieces**

- Packed in environmentally-friendly cardboard box
- Handles with VDE insulating sleeves as per EN 60900 / IEC 60900:2004



**1000 V**

Code	No.	Contents		
1550594	<b>VDE S 8003 H</b>	<b>VDE 8132-160 H</b> <b>VDE 8250-180 H</b> <b>VDE 8314-160 H</b>	747	1

**RZB2-5**

**VDE PLIERS SET 3 pieces**

- In rugged plastic case
- Handles with VDE insulated up to 1000 V, acc. to EN 60900 / IEC 60900:2004, dipped insulation



**1000 V**

Code	No.	Contents		
1708244	<b>RZB2-5</b>	<b>VDE 8098-160 H</b> <b>VDE 8250-180 H</b> <b>VDE 8314-160 H</b>	835	1







### RZB2-11

#### VDE PLIERS SET 3 pieces

- ▶ In rugged plastic case
- ▶ Handles with VDE insulated up to 1000 V, acc. to EN 60900 / IEC 60900:2004, dipped insulation



Code	No.	Contents	🔧	📦
1692291	<b>RZB2-11</b>	<b>VDE 8132-160 H</b> <b>VDE 8250-180 H</b> <b>VDE 8314-160 H</b>	865	1

### VDE 1001

#### VDE TOOL SET 14 pieces

- ▶ With practical foam insert in sturdy PVC case
- ▶ Dimensions: 360 x 250 x 70 mm
- ▶ Cranked allen socket screwdriver No. 42 is for locking the extension VDE 1991, no VDE



Code	No.	Contents	🔧	📦
6602560	<b>VDE 1001</b>	<b>VDE 19 10 12 13 14 17 19 22 24</b> <b>VDE 1993 U</b> <b>VDE 1990-5 -10</b> <b>VDE 1989 T</b> <b>VDE 2170 5,5</b> <b>42 2,5</b>	3,5	1


Contents	
	<b>VDE 19 10 12 13 14 17 19 22 24</b>
	<b>VDE 1993 U</b>
	<b>VDE 1990 -5 -10</b>
	<b>VDE 1989 T</b>
	<b>VDE 2170 5,5</b>
	<b>42 2,5</b>

## VDE ASSORTMENTS

### RZB1-17

#### VDE TOOL SET 8 pieces

- ▶ In rugged plastic case



Code	No.	Contents	🔧	📦
1828045	<b>RZB1-17</b>	<b>VDE 8132-200 H</b> <b>VDE 8250-180 H</b> <b>VDE 8314-160 H</b> <b>VDE 2170 4 5,5</b> <b>VDE 2160 PH 1 2</b> <b>4615 3</b>	1700	1

Contents	
	<b>VDE 8132-200 H</b>
	<b>VDE 8250-180 H</b>
	<b>VDE 8314-160 H</b>
	<b>VDE 2170 4 5,5</b>
	<b>VDE 2160 PH 1 2</b>
	<b>4615 3</b>



**S 1023 M**

**TOOL ASSORTMENT FOR MECHANICAL ENGINEERS 118 pieces**

- ✔ Practical entry-level toolset
- ✔ The range includes mechanical and electrical engineering tools



Code	No.	Contents	13.0
1999060	<b>S 1023 M</b>	118 tools in metric sizes	13.0

Contents	
	<b>1 B</b> 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22
	<b>D 20</b> 4 5 6 7 8 9 10 11 12 13
	<b>680</b> 4 5,5 6,5
	<b>685</b> 3 4 5 6
	<b>685 X</b> 5 6 8
	<b>687 TX</b> T10 T15 T20 T25 T27 T30 T40
	<b>690</b> 1 2
	<b>690 PZD</b> 1 2 3
	<b>620</b>
	<b>676</b>
	<b>699</b>
	<b>2090</b> -4
	<b>2093 U</b> -20
	<b>1993 U</b> -10 T
	<b>19</b> 8 9 10 11 12 13 14 15 16 17 19 22 24 27 30 32
	<b>1987</b>

Contents	
	<b>1990</b> -5 -10
	<b>1995</b>
	<b>VDE 8132</b> -200 H
	<b>VDE 8250</b> -180 H
	<b>VDE 8314</b> -160 H
	<b>VDE 2170</b> 4 5,5
	<b>VDE 2160 PH</b> 1 2
	<b>V 4614 PLUS</b>
	<b>4615</b> 3
	<b>171 IS</b> 1,2 1,5 2
	<b>165 PH</b> 00 0
	<b>8305</b> -2
	<b>8306</b> -5
	<b>42</b> 1,3 1,5 2 (5/64AF) 2,5 3 4 5 6 8 10
	<b>97</b> -150

Contents	
	<b>100</b> -10
	<b>119</b> -3 -5
	<b>600 H</b> -500
	<b>248 ST</b> -30
	<b>8701</b> 2-8
	<b>8719</b> 2-8
	<b>8722</b> 2-8
	<b>403</b>
	<b>4528</b>
	<b>710</b>
	<b>745</b>
	<b>4534</b> -3
	<b>298</b> -04
	<b>8354</b> -1
	<b>8139</b> -220 TL

**1090**

**TOOL CASE ELECTRICIAN 90 pieces**

- ✔ The perfect tool set for the electrician or property manager
- ✔ A thoughtful assortment for the work to be done
- ✔ Packed in a strong plastic case with aluminium frame
- ✔ Three steel hinges, screwed handle, fitted with built in locks
- ✔ May be used wherever the right tools have to be always at hand
- ✔ GEDORE vanadium tools, chrome-plated
- ✔ Dimensions: W 460 x D 380 x H 200 mm
- ✔ No. 1090 = set with case
- ✔ No. S 1090 = set without case
- ✔ No. WK 1090 L = case empty



1090

Code	No.	Contents	13.2
6601590	<b>1090</b>	90 tools in case	13.2
6601400	<b>S 1090</b>	90 tools without case	8.3
5600060	<b>WK 1090 L</b>	Case empty	4.2

Contents	
	<b>401</b>
	<b>401 A</b> [10x]
	<b>6</b> 14x17 18x19 21x23 22x24
	<b>8</b> 4 4,5 5 5,5 6 7 8 9 10 11 12 13
	<b>20</b> 4 4,5 5 5,5 6 7 8 9 10 11 13
	<b>2087</b>
	<b>2095</b>

Contents	
	<b>2098</b>
	<b>2090</b> -4
	<b>2093 U</b> -3
	<b>42</b> 2 (5/64AF) 2,5 3 4 5 6 7 8 10
	<b>60 CP</b> 10
	<b>156</b> 5

Contents	
	<b>2153</b> 5,5
	<b>2161 PH</b> 1
	<b>2160 PZ</b> 1 2
	<b>VDE 2160 PH</b> 1 2
	<b>VDE 2170</b> 3,5 4 5,5 6,5
	<b>4615</b> 3,5
	<b>173</b> 5,5 8

	Contents
	174 1
	745
	4522
	4534 -3
	145 10 JC
	8096 -140
	VDE 8098 -160
	VDE 8120 -160
	VDE 8250 -180
	VDE 8132 AB -160

	Contents
	VDE 8316 -200
	95 -175
	99 10-2 10-4
	101
	112 A -250

	Contents
	112 S
	600 H -300
	72 H -100
	E-1090 LK LZ LF LS

### 1091

#### ELECTRICIANS TOOL CASE 18 pieces

- Robust tool case with 18-piece basic assortment. Particularly suitable for beginners in electronic professions
- From eco-friendly tanned cowhide
- Carefully processed with strong industrial seams
- Base insert from zinc-plated sheet steel
- Edges reinforced with aluminium angle brackets, metal parts durable riveted
- With feet to protect sensitive surfaces
- Front part can be lowered for quick access to the tools, with two key locks to prevent inadvertent opening
- Removable carrying strap with shoulder protector and sturdy carrying handle
- Anti-theft protection due to two lockable notches, delivery includes two keys
- Document partition
- Interior measurements 430 x 200 x 290 mm
- No. 1091 = set with case
- No. WK 1091 L = case empty



Code	No.	Contents	Weight
1953710	<b>1091</b>	18 tools in case	6.0
1953729	<b>WK 1091 L</b>	Case empty	4.2

	Contents
	VDE 2133 7 8 10
	VDE 2160 PH 1 2 3
	VDE 2170 3 4 5,5
	4528
	4533 -2
	V 4614 PLUS
	4629
	8097
	VDE 8132 -160 H
	VDE 8250 -180 H
	VDE 8316 -180 H
	E-1091 ST

### VDE 1030

#### VDE TOOL CABINET 108 pieces

- Complete with a selection of VDE tools
- Dimensions: 190 x 500 x 750 mm



Code	No.	Contents	Weight	Quantity
6602130	<b>VDE 1030</b>	108 tools in cabinet	46.0	1
5600730	<b>VDE 1030 L</b>	Cabinet, empty	20.0	1

	Contents
	VDE 2133 5 6 7 8 9 10 11 12 13
	VDE 19 10 11 12 13 14 15 17 19 22 24 27 30 32
	VDE IN 19 5 6 8
	VDE 1990 -5 -10
	VDE 1993 U
	VDE 2170 2,5 4 5,5 6,5
	VDE 2160 PH 0 1 2
	VDE 894 10 11 12 13 14 15 16 17 19
	VDE 8098 -160 H
	VDE 8132 -160 H
	VDE 8250 -160 H
	VDE 8314 -160 H
	VDE 4507 -4
	647
	171 IS 1,2 1,5 2
	165 PH 00 0
	8305 -2
	8306 -5
	4 K -500
	1500 H 1-50 [6x] 2-13 [17x] 3 [27x]





**S 1093**

**TOOL ASSORTMENT 26 pieces**

- Particularly suited as the initial outfit for electrical specialists
- The GEDORE tool case or tool trolley are suited for mobile assignments



Inhalt
142 10 C
VDE 8250 -180 H
VDE 8132 -160 H
VDE 8314 -160 H
VDE 2170 4,5,5,6,5,8
VDE 2160 PZ 1 2
V 4614 PLUS
42 2 (5/64AF) 2,5 3 4 5 6 8 10
4533 -2
4528
8097
600 H -500
112 A -250
110 HS -318
0175 -06

Code	No.	Contents	
2319942	<b>S 1093</b>	26 Tools	

**VDE ACCESSORIES**

**VDE 910**

**VDE RUBBER COVER SHEET**

- VDE protective equipment acc. to VDE 0680, Part 1




Code	No.	L	W		
1826816	<b>VDE 910 13</b>	130	130	40	1
1826832	<b>VDE 910 25</b>	250	350	210	1
1827030	<b>VDE 910 50</b>	500	500	430	1
1828193	<b>VDE 910 60</b>	600	600	700	1
1828207	<b>VDE 910 100</b>	1000	1000	1800	1
1828215	<b>VDE 910 120</b>	1200	1200	2950	1

**VDE 912**

**VDE ELECTRICIANS' SAFETY GLOVES**

- Acc. to DIN EN 60903
- Made of natural latex



Code	No.		
1828274	<b>VDE 912 9</b>	215	1
1828282	<b>VDE 912 10</b>	215	1



**VDE 911**

**VDE INSULATION MAT**

- VDE protective equipment acc. to VDE 0303



Code	No.	L	W		
1828258	<b>VDE 911 100</b>	1000	1000	6.0	1
1828266	<b>VDE 911 1000</b>	10000	1000	60.0	1

**VDE 912**

**UNDER-GLOVES for VDE 912**



Code	No.		
1828290	<b>VDE 912 50</b>	50	1

## VDE VARIOUS

### VDE 4522

#### VDE CABLE KNIFE

- Strong, straight blade made from hardened and tempered steel
- Tough, resilient plastic handle
- With VDE insulation according to EN 60900 / IEC 60900:2004



Code	No.				
6690400	<b>VDE 4522</b>	50	180	104	5

### VDE 4527

#### VDE CABLE KNIFE with hooked blade

- For slitting and stripping damp-proof installation cables
- With blade protector
- With VDE insulation according to EN 60900 / IEC 60900:2004



Code	No.				
6698490	<b>VDE 4527</b>	40	203	98	1

### V 406

#### HACKSAW

- For pinned hacksaw blades, 148 mm
- Insulated handle up to 1000 V
- Not certified acc. to VDE

1000 V



Code	No.			
6120060	<b>V 406</b>	265	229	1

### VDE 913

#### VDE PLASTIC CLAMP

- VDE protective equipment acc. to VDE 0680, Part 1



Code	No.			
1828304	<b>VDE 913 80</b>	80	30	1
1828312	<b>VDE 913 160</b>	160	70	1

### VDE 914

#### VDE METER CONNECTION FITTINGS

- For insulating single cores
- Conical form
- Made from resilient plastic
- VDE 914 1 with Designation 1
- VDE 914 2 with Designation 2
- VDE 914 3 with Designation 3



1000 V

Code	No.				
2324938	<b>VDE 914 1</b>	80	10	1	
2324946	<b>VDE 914 2</b>	80	10	1	
2324954	<b>VDE 914 3</b>	80	10	1	



More VDE tools on request!  
Haven't you found the right tool?  
Ask us about custom-orders.  
Your problems are our assignments.

[www.gedore.com](http://www.gedore.com)



Sheath-stripping, wire-stripping, crimping tools etc. can be found on pages



332  
-  
339

