

Code-Nr. F24  
No. 42  
EDGE-WALKER  
L2

Code-Nr. F24  
No. 42

L2

$90^\circ \pm 20^\circ - 1^\circ$

10 8 6 5  
(GEDORE)

2 2.5 3 4

$45^\circ \pm 3^\circ$



FOR EXTRA POWER



## ++ THE PERFECT DRIVE ++



SERVICE / FEATURES

290

3C-SCREWDRIVER



291 - 294

3C-SCREWDRIVER WITH STRIKING CAP



295



SCREWDRIVER WITH WOODEN HANDLE



296

ELECTRONIC SCREWDRIVER



296 - 297

HEXAGON ALLEN KEYS



298 - 303

TORQUE SCREWDRIVER



304 - 305



For further models see product group Torque Tools page 258 - 259





VOLTAGE TESTER



305



VARIOUS



305



# DREMO PLUS 3 C +

## DESIGNED FOR EXTRA STRENGTH AND DURABILITY!

### FEATURES

#### Advantages

The soft component in the rear part of the handle. It permits the full force of the hand to be employed in turning the screwdriver and prevents early tiredness when the tool is used continually.

The robust core is in the inside of the handle. It absorbs the force from the outer components and transfers it safely to the shaft.

The hard component in the front part of the handle has been designed to make fast turning with low resistance much easier.

The blade in chrome vanadium steel is fully hardened over the whole length and thus fulfills all the requirements for safe working.

In the case of stubborn screws, the forged-on hexagon bolster permits an increase in the torque with the use of an adjustable spanner. (Only screwdrivers 2154SK, 2160SK and 2154)

Seized screws are loosened by gently knocking on the striking cap. The striking cap transfers the impact energy to the blade by means of a special damping system so that it is easy on the hands and prevents bounce.



**i** Good torque transfer, irrespective of hand size

- Head marking for specifically and rapidly accessing the right screwdriver
- Colour code of the drive type

**i** Good torque transfer, irrespective of hand size

**M**

**XL**

**88**

**506**

**494**

**NC**



## 3C-SCREWDRIVER

### 2150

#### 3C-SCREWDRIVER for slotted head screws

- Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- \* not standardised



Code	No.	*	mm <sub>±</sub> ≪	mm <sub>±</sub> ≧	∅	mm	mm	mm	mm	mm	mm
6679270	<b>2150 3</b>	*	0.5	3.0	3	80	160	30	10		
6679350	<b>2150 4</b>		0.8	4.0	4	100	190	52	10		
6679430	<b>2150 5,5</b>		1.0	5.5	5	125	225	79	10		
6679510	<b>2150 6,5</b>		1.2	6.5	6	150	260	110	10		
6679780	<b>2150 8</b>		1.2	8.0	7	175	295	150	10		
6679860	<b>2150 10</b>		1.6	10.0	8	200	320	183	10		
6679940	<b>2150 12</b>		2.0	12.0	9	250	370	237	10		
1828673	<b>2150 14</b>	*	2.5	14.0	11	250	370	309	1		

### 2150

#### 3C-SCREWDRIVER for slotted head screws, special lengths

- With parallel blade, apart from length 300/400
- Blade tip acc. to DIN ISO 2380-1 Form B
- Blade in vanadium plus steel
- 3-component handle with hanging hole
- \* not standardised



Code	No.	*	mm <sub>±</sub> ≪	mm <sub>±</sub> ≧	∅	mm	mm	mm	mm	mm	mm
6680010	<b>2150 3-100</b>		0.5	3.0	3,0	100	180	32	10		
6680280	<b>2150 3-150</b>	*	0.5	3.0	3,0	150	230	35	10		
6680360	<b>2150 4-150</b>	*	0.8	4.0	4,0	150	240	60	10		
6680440	<b>2150 5,5-100</b>		1.0	5.5	5,5	100	200	77	10		
6680520	<b>2150 5,5-150</b>		1.0	5.5	5,5	150	250	90	10		
6680600	<b>2150 5,5-250</b>	*	1.0	5.5	5,5	250	350	111	10		
6680790	<b>2150 6,5-100</b>		1.2	6.5	6,5	100	210	108	10		
6680870	<b>2150 6,5-200</b>	*	1.2	6.5	6,5	200	310	134	10		
1646478	<b>2150 6,5-300</b>	*	1.2	6.5	6,0	300	410	14	1		
1646486	<b>2150 6,5-400</b>	*	1.2	6.5	6,0	400	510	16	1		
6680950	<b>2150 8-125</b>		1.2	8.0	8,0	125	245	152	10		
6681090	<b>2150 8-225</b>	*	1.2	8.0	8,0	225	345	194	10		
1646494	<b>2150 8-300</b>	*	1.2	8.0	8,0	300	420	21	1		
1646508	<b>2150 8-400</b>	*	1.2	8.0	8,0	400	520	25	1		
6681170	<b>2150 10-150</b>		1.6	10.0	10,0	150	270	210	10		
6681840	<b>2150 10-250</b>	*	1.6	10.0	10,0	250	370	273	10		

### 2153

#### SCREWDRIVER for slotted head screws, stubby

- Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form B
- Blade in vanadium plus steel, chrome-plated
- 1-component handle, blue, with hanging hole




Code	No.	mm <sub>±</sub> ≪	mm <sub>±</sub> ≧	∅	mm	mm	mm	mm	mm
1531174	<b>2153 4</b>	0.8	4.0	4,0	25	75	31	10	
1482432	<b>2153 5,5</b>	1.0	5.5	5,5	25	75	36	10	
1531182	<b>2153 6,5</b>	1.2	6.5	6,5	25	75	39	10	
1531190	<b>2153 8</b>	1.2	8.0	8,0	25	75	44	10	

### 2154

#### 3C-SCREWDRIVER for slotted head screws

- Blade with hexagon bolster
- Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- \* not standardised



Code	No.	*	mm <sub>±</sub> ≪	mm <sub>±</sub> ≧	∅	mm	mm	mm	mm	mm	mm
1828681	<b>2154 3,5</b>	*	0.6	3.5	4	75	180	8	66	10	
6682490	<b>2154 4,5</b>	*	0.8	4.5	5	100	200	8	73	10	
6682570	<b>2154 5,5</b>		1.0	5.5	5	100	200	8	75	10	
6682650	<b>2154 6,5</b>		1.2	6.5	6	125	235	10	109	10	
6682730	<b>2154 8</b>		1.2	8.0	7	150	270	13	152	10	
6682810	<b>2154 10</b>		1.6	10.0	8	175	295	13	180	10	
6683030	<b>2154 12</b>		2.0	12.0	9	200	320	16	227	10	
1531158	<b>2154 14</b>		2.5	14.0	11	250	370	16	332	10	

### 2170

#### 3C-SCREWDRIVER for slotted head screws, insulated blade

- Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form B
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole



Code	No.	mm <sub>±</sub> ≪	mm <sub>±</sub> ≧	∅	mm	mm	mm	mm	mm
6678700	<b>2170 2,5</b>	0.4	2.5	2,5	75	155	28	10	
6678890	<b>2170 3</b>	0.5	3.0	3,0	75	155	30	10	
6678970	<b>2170 4</b>	0.8	4.0	4,0	100	190	53	10	
6679000	<b>2170 5,5</b>	1.0	5.5	5,5	125	225	88	10	
6679190	<b>2170 6,5</b>	1.2	6.5	6,5	150	260	123	10	

### 2160 PH

#### 3C-SCREWDRIVER for cross-slotted head screws PH

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- Size 3 and 4 blade with hexagon bolster
- \* not standardised



Code	No.	*	PH	mm	∅	mm	mm	mm	mm	mm
6683110	<b>2160 PH 0</b>	0	PH	M1,6 - M2	3,0	60	140	293	10	
6683380	<b>2160 PH 1</b>	1	PH	M2 - M3	4,5	80	180	66	10	
6683700	<b>2160 PH 1-200</b>	1	PH	M2 - M3	4,5	200	300	152	10	
6683460	<b>2160 PH 2</b>	2	PH	M3,5 - M5	6,0	100	210	101	10	
6683890	<b>2160 PH 2-200</b>	2	PH	M3,5 - M5	6,0	200	310	146	10	
1646516	<b>2160 PH 2-300</b>	*	2	M3,5 - M5	6,0	300	410	14	1	
1646524	<b>2160 PH 2-400</b>	*	2	M3,5 - M5	6,0	400	510	158	1	
6683540	<b>2160 PH 3</b>	3	PH	M5,5 - M7	8,0	150	270	13	172	10
6683620	<b>2160 PH 4</b>	4	PH	M8 - M10	10,0	200	320	16	254	10

### 2161 PH

#### SCREWDRIVER for cross-slotted head screws PH, stubby

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- Blade in vanadium plus steel, chrome-plated
- 1-component handle, blue, with hanging hole



Code	No.	PH	mm	∅	mm	mm	mm	mm	mm
1482440	<b>2161 PH 1</b>	1	M2 - M3	4,5	25	75	33	10	
1531204	<b>2161 PH 2</b>	2	M3,5 - M5	6,0	25	75	36	10	



**2160 PZ**

**3C-SCREWDRIVER for cross-slotted head screws PZ**

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- Size 3 and 4 blade with hexagon bolster



Code	No.	⊕ PZ	□ mm	∅	mm	mm	mm	mm	mm
6683970	<b>2160 PZ 0</b>	0	M1,6 - M2	3,0	60	140	29	10	
6684000	<b>2160 PZ 1</b>	1	M2 - M3	4,5	80	180	65	10	
6684190	<b>2160 PZ 2</b>	2	M3,5 - M5	6,0	100	210	101	10	
6684270	<b>2160 PZ 3</b>	3	M5,5 - M7	8,0	150	270	13	169	10
6684350	<b>2160 PZ 4</b>	4	M8 - M10	10,0	200	320	16	253	10

**2161 PZ**

**SCREWDRIVER for cross-slotted head screws PZ, stubby**

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- Blade in vanadium plus steel, chrome-plated
- 1-component handle, blue, with hanging hole




Code	No.	⊕ PZ	□ mm	∅	mm	mm	mm	mm
1550608	<b>2161 PZ 1</b>	1	M2 - M3	4,5	25	75	32	10
1550616	<b>2161 PZ 2</b>	2	M3,5 - M5	6,0	25	75	37	10

**2163 BTX**

**3C-SCREWDRIVER for recessed TORX® head screws**

- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Code	No.	⊕	□ mm	∅ mm	∅	mm	mm	mm	mm
1828703	<b>2163 BTX T3</b>	T3	M1,2 - M1,4	1.13	3,0	60	140	28	10
1828711	<b>2163 BTX T4</b>	T4	M1,4	1.29	3,0	60	140	27	10
1616471	<b>2163 BTX T5</b>	T5	M1,8	1.42	3,0	60	140	28	10
6685400	<b>2163 BTX T6</b>	T6	M2	1.69	3,0	60	140	29	10
6685590	<b>2163 BTX T7</b>	T7	M2,5	1.99	3,0	60	140	29	10
6685670	<b>2163 BTX T8</b>	T8	M2,5	2.31	3,0	60	140	29	10
6685750	<b>2163 BTX T9</b>	T9	M3	2.50	3,0	60	140	29	10
6685830	<b>2163 BTX T10</b>	T10	M3 - M3,5	2.74	3,0	80	160	30	10
6685910	<b>2163 BTX T15</b>	T15	M3,5 - M4	3.27	3,5	80	170	45	10
6686050	<b>2163 BTX T20</b>	T20	M4 - M5	3.86	4,0	100	190	51	10
6686130	<b>2163 BTX T25</b>	T25	M4,5 - M5	4.43	4,5	100	200	68	10
6686210	<b>2163 BTX T27</b>	T27	M4,5 - M6	4.99	5,5	115	215	84	10
6686480	<b>2163 BTX T30</b>	T30	M6 - M7	5.52	6,0	115	225	105	10
6686560	<b>2163 BTX T40</b>	T40	M7 - M8	6.65	7,0	130	240	126	10
6686640	<b>2163 BTX T45</b>	T45	M8 - M10	7.82	8,0	130	250	156	10
6686720	<b>2163 BTX T50</b>	T50	M10	8.83	9,0	150	270	186	10

**2163 TXB**

**3C-SCREWDRIVER for recessed TORX® head screws with pilot**

- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	⊕	□ mm	∅ mm	∅	mm	mm	mm	mm
1828738	<b>2163 TXB T6</b>	T6	M2	1.69	3,0	60	140	29	10
6677570	<b>2163 TXB T7</b>	T7	M2,5	1.99	3,0	60	140	25	10
6677650	<b>2163 TXB T8</b>	T8	M2,5	2.31	3,0	60	140	29	10
6677730	<b>2163 TXB T9</b>	T9	M3	2.50	3,0	60	140	29	10
6677810	<b>2163 TXB T10</b>	T10	M3 - M3,5	2.74	3,0	80	160	30	10
6678030	<b>2163 TXB T15</b>	T15	M3,5 - M4	3.27	3,5	80	170	45	10
6678110	<b>2163 TXB T20</b>	T20	M4 - M5	3.86	4,0	100	190	51	10
6678380	<b>2163 TXB T25</b>	T25	M4,5 - M5	4.43	4,5	100	200	68	10
6678460	<b>2163 TXB T27</b>	T27	M4,5 - M6	4.99	5,5	115	215	84	10
6678540	<b>2163 TXB T30</b>	T30	M6 - M7	5.52	6,0	115	225	105	10
6678620	<b>2163 TXB T40</b>	T40	M7 - M8	6.65	7,0	130	240	125	10

**2163 BK**

**3C-SCREWDRIVER for in-hex screws, with ball end**

- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole



Code	No.	∅ mm	∅	mm	mm	mm	mm
1828746	<b>2163 BK 2</b>	2	3	75	155	31	10
6684430	<b>2163 BK 3</b>	3	4	75	155	36	10
6684510	<b>2163 BK 4</b>	4	5	100	190	59	10
6684780	<b>2163 BK 5</b>	5	6	100	200	86	10
6684860	<b>2163 BK 6</b>	6	7	125	235	121	10
6684940	<b>2163 BK 8</b>	8	10	150	270	210	10
6685080	<b>2163 BK 10</b>	10	12	150	270	265	10
6685160	<b>2163 BK 12</b>	12	14	160	280	349	10

**3C-SCREWDRIVER SETS**

**2150-2160 PH**

**3C-SCREWDRIVER SET 6 pieces / 10 pieces**

- Practical set composition in environmentally-friendly cardboard box
- For slotted and cross-slotted head screws PH
- Blades in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole



Code	No.	Contents	mm	mm
1482319	<b>2150-2160 PH-06</b>	⊖ 2150 4 5,5 6,5 8 ⊕ 2160 PH 1 2	660	1
1482343	<b>2150-2160 PH-010</b>	⊖ 2150 3 4 5,5 6,5 8 ⊖ 2153 5,5 ⊕ 2160 PH 1 2 ⊕ 2161 PH 1 ⊖ 4615 3,5	825	1





### 2154-2160 PH-07

#### 3C-SCREWDRIVER SET 7 pieces

- Practical set composition in environmentally-friendly cardboard box
- For slotted and cross-slotted head screws PH
- Blade with hexagon bolster
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole



Code	No.	Contents	📦	📅
1731149	<b>2154-2160 PH-07</b>	⊖ 2154 4,5 5,5 6,5 8 ⊕ 2160 PH 1 2 ⊕ 4615 3	715	1

### 2150-2160 PZ-06

#### 3C-SCREWDRIVER SET 6 pieces

- Practical set composition in environmentally-friendly cardboard box
- For slotted and cross-slotted head screws PZ
- Blades in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole




Code	No.	Contents	📦	📅
1482300	<b>2150-2160 PZ-06</b>	⊖ 2150 4 5,5 6,5 8 ⊕ 2160 PZ 1 2	670	1

### 2160 PHZ-06

#### 3C-SCREWDRIVER SET 6 pieces

- Practical set composition in environmentally-friendly cardboard box
- For cross-slotted head screws PH and PZ
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole

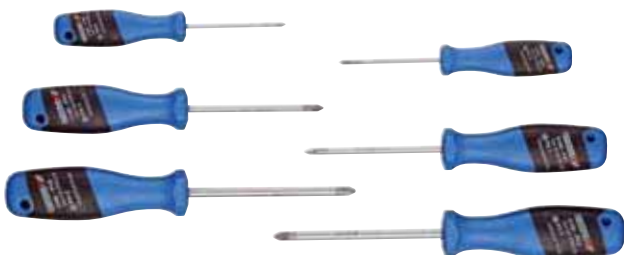


Code	No.	Contents	📦	📅
2003589	<b>2160 PHZ-06</b>	⊕ 2160 PH 0 1 2 ⊕ 2160 PZ 0 1 2	344	1

### 2163 BTX

#### 3C-SCREWDRIVER SET 5 pieces / 10 pieces

- Practical set composition in environmentally-friendly cardboard box
- For recessed TORX® head screws
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

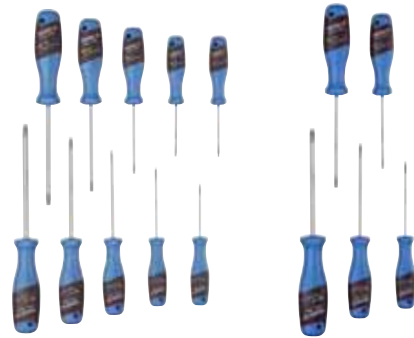

Code	No.	Contents	📦	📅
1482327	<b>2163 BTX-05</b>	⊕ 2163 BTX T10 T15 T20 T25 T30	435	1
1482335	<b>2163 BTX-010</b>	⊕ 2163 BTX T7 T8 T9 T10 T15 T20 T25 T27 T30 T40	740	1



### 2163 TXB-05

#### 3C-SCREWDRIVER SET 5 pieces

- Practical set composition in environmentally-friendly cardboard box
- For recessed TORX® head screws with pilot
- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	Contents	📦	📅
1616617	<b>2163 TXB-05</b>	⊕ 2163 TXB T10 T15 T20 T25 T30	440	1

### VS 2155 S

#### SCREWDRIVER SALES STAND 155 pieces

- Blade in vanadium plus steel, chrome-plated
- 3-component handle with hanging hole
- Display made from acrylic glass, dimensions: W 580 x H 380 x D 80 mm



Code	No.	Contents	📦	📅
6424600	<b>VS 2155 S</b>	5x ⊖ 2150 3 4 5,5 6,5 8 10 5x ⊖ 2154 5,5 6,5 8 10 12 5x ⊖ 2153 5,5 6,5 8 5x ⊖ 2170 2,5 3 4 5,5 6,5 5x ⊕ 2160 PH 0 1 2 3 4 5x ⊕ 2161 PH 1 2 5x ⊕ 2160 PZ 0 1 2 3 4	21.0	1





**VS 2150-2154**

**SCREWDRIVER SALES STAND 48 pieces**

- For slotted head screws
- Dimensions: W 440 x H 290 x D 140 mm





Code	No.	Contents		
1948458	<b>VS 2150-2154</b>	4x $\ominus$ 2150 3 4 5,5 6,5 8 10 4x $\ominus$ 2153 5,5 6,5 4x $\ominus$ 2154 6,5 8 10 12	8.3	1

**VS 2150 XL**

**SCREWDRIVER SALES STAND 36 pieces**

- For slotted head screws, special lengths
- Dimensions: W 325 x H 185 x D 100 mm





Code	No.	Contents		
1948482	<b>VS 2150 XL</b>	4x $\ominus$ 2150 3-100 3-150 4-150 5,5-100 5,5-150 6,5-200 8-125 8-225 10-150	6.8	1

**VS 2160-2161**

**SCREWDRIVER SALES STAND 48 pieces**

- For cross-slotted head screws PH and PZ
- Dimensions: W 440 x H 180 x D 100 mm





Code	No.	Contents		
1948431	<b>VS 2160-2161</b>	4x $\oplus$ 2160 PH 0 1 2 3 4 4x $\oplus$ 2161 PH 1 2 4x $\oplus$ 2160 PZ 0 1 2 3 4	8.2	1

**VS 2163**

**SCREWDRIVER SALES STAND 40 pieces**

- For recessed TORX® head screws and recessed TORX® head screws with pilot
- Dimensions: W 325 x H 190 x D 100 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Code	No.	Contents		
1948466	<b>VS 2163 BTX</b>	4x $\star$ 2163 BTX T6 T7 T8 T9 T10 T15 T20 T25 T27 T30	4.8	1
1948474	<b>VS 2163 TXB</b>	4x $\star$ 2163 TXB T6 T7 T8 T9 T10 T15 T20 T25 T27 T30	4.7	1

[www.gedore.com](http://www.gedore.com)



## 3C-SCREWDRIVER WITH STRIKING CAP

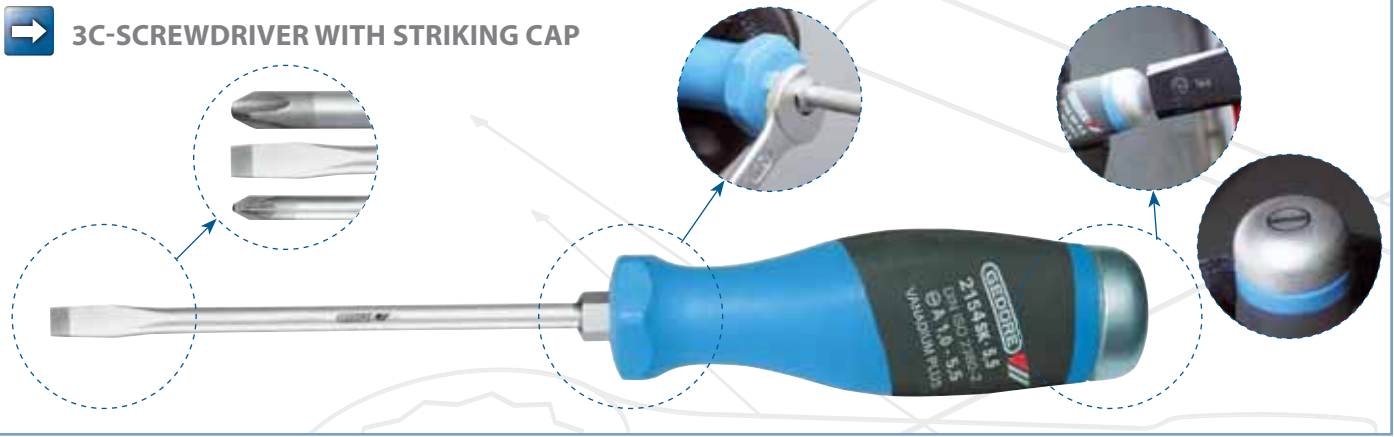

## 3C-SCREWDRIVER WITH STRIKING CAP

### 2154SK

#### 3C-SCREWDRIVER WITH STRIKING CAP for slotted head screws

- Acc. to DIN ISO 2380-2, blade tip acc. to DIN ISO 2380-1 Form A
- Blade with hexagon bolster
- Blade in vanadium plus steel, chrome-plated
- 3-component handle




Code	No.	mm	mm	Ø	mm	mm	mm	mm	mm
1845209	<b>2154SK 3,5</b>	0.6	3.5	4	75	180	8	86	1
1845217	<b>2154SK 4,5</b>	0.8	4.5	5	90	195	8	90	1
1845225	<b>2154SK 5,5</b>	1.0	5.5	5	100	205	8	92	1
1845233	<b>2154SK 6,5</b>	1.2	6.5	6	125	245	10	154	1
1845241	<b>2154SK 8</b>	1.2	8.0	7	150	270	13	178	1
1845268	<b>2154SK 10</b>	1.6	10.0	8	175	295	13	214	1
1845276	<b>2154SK 12</b>	2.0	12.0	9	200	320	16	260	1
1845284	<b>2154SK 14</b>	2.5	14.0	11	200	320	16	324	1

### 2160SK PH

#### 3C-SCREWDRIVER WITH STRIKING CAP for cross-slotted head screws PH

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PH
- Blade with hexagon bolster
- Blade in vanadium plus steel, chrome-plated
- 3-component handle



Code	No.	PH	mm	Ø	mm	mm	mm	mm	mm
1845292	<b>2160SK PH 1</b>	1	M2 - M3	4	80	185	8	86	1
1845306	<b>2160SK PH 2</b>	2	M3,5 - M5	6	120	220	10	148	1
1845314	<b>2160SK PH 3</b>	3	M5,5 - M7	8	150	270	13	204	1
1845322	<b>2160SK PH 4</b>	4	M8 - M10	10	200	320	16	292	1

### 2160SK PZ

#### 3C-SCREWDRIVER WITH STRIKING CAP for cross-slotted head screws PZ

- Acc. to DIN ISO 8764, tip acc. to DIN ISO 8764-1 PZ
- Blade with hexagon bolster
- Blade in vanadium plus steel, chrome-plated
- 3-component handle



Code	No.	PZ	mm	Ø	mm	mm	mm	mm	mm
1845330	<b>2160SK PZ 1</b>	1	M2 - M3	4	80	185	8	86	1
1845349	<b>2160SK PZ 2</b>	2	M3,5 - M5	6	120	220	10	148	1
1845357	<b>2160SK PZ 3</b>	3	M5,5 - M7	8	150	270	13	206	1
1845365	<b>2160SK PZ 4</b>	4	M8 - M10	10	200	320	16	292	1

## SK 2154 PH-06

### 3C-SCREWDRIVER SET WITH STRIKING CAP 6 pieces

- Practical set composition in environmentally-friendly cardboard box
- For firmly seated slotted and cross-slotted head screws PH
- Blade with hexagon bolster
- Blade in vanadium plus steel, chrome-plated
- 3-component handle



Code	No.	Contents	mm	mm
1878743	<b>SK 2154 PH-06</b>	⊖ 2154SK 4,5 5,5 6,5 8 ⊕ 2160SK PH 1 2	880	1








**SCREWDRIVER WITH WOODEN HANDLE**

**147**

**SCREWDRIVER for slotted head screws**

- ✔ Similar to DIN ISO 2380-2 Row B+C, blade tip acc. to DIN ISO 2380-1 Form A
- ✔ Blade tanged right through the handle, chrome-plated
- ✔ GEDORE vanadium steel 50CrV4
- ✔ Hardwood handle, clear varnished with leather cap
- ✔ Hexagon bolster for extra power

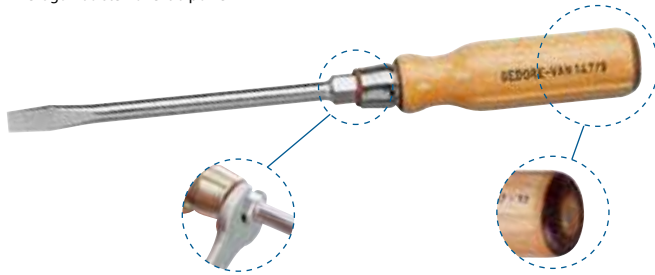


Code	No.	mm <sub>±</sub>	mm <sub>±</sub>	mm	mm	mm	mm	mm
6413830	<b>147 3,5</b>	3.5	0.6	75	170	6	55	5
6413910	<b>147 4,5</b>	4.5	0.8	90	185	6	59	5
6414050	<b>147 5,5</b>	5.5	1.0	100	200	8	73	10
6414130	<b>147 7</b>	7.0	1.2	125	235	10	112	10
6414210	<b>147 9</b>	9.0	1.4	150	270	12	166	10
6414480	<b>147 10</b>	10.0	1.6	175	300	12	192	5
6414560	<b>147 12</b>	12.0	2.0	200	330	13	250	5



**148**

**SCREWDRIVER for slotted head screws**

- ✔ Similar to DIN ISO 2380-2 Row B+C, blade tip acc. to DIN ISO 2380-1 Form A
- ✔ Hexagon blade with forged bolster
- ✔ Blade tanged right through the handle, chrome-plated
- ✔ GEDORE vanadium steel 50CrV4
- ✔ Hardwood handle, clear varnished with leather cap

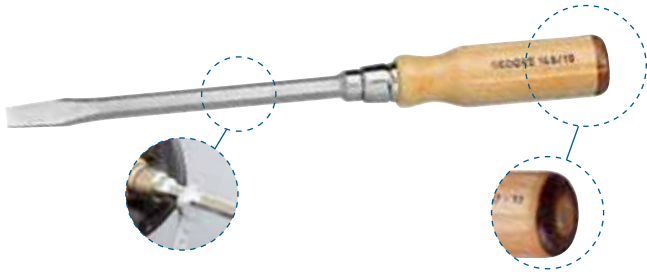


Code	No.	mm <sub>±</sub>	mm <sub>±</sub>	mm	mm	mm	mm	mm
6415020	<b>148 5,5</b>	5.5	0.8	100	200	6	83	5
6415100	<b>148 7</b>	7.0	1.0	125	230	7	123	5
6415290	<b>148 8</b>	8.0	1.2	150	270	8	174	5
6415370	<b>148 10</b>	10.0	1.6	175	300	8	233	5
6415450	<b>148 12</b>	12.0	2.0	200	330	12	381	5
6415530	<b>148 14</b>	14.0	2.5	250	390	12	478	5

**162**

**SCREWDRIVER for cross-slotted head screws PH**

- ✔ Similar to DIN ISO 8764-2, tip acc. to DIN ISO 8764-1 PH
- ✔ Blade tanged right through the handle, chrome-plated
- ✔ GEDORE vanadium steel 50CrV4
- ✔ Hardwood handle, clear varnished with leather cap
- ✔ Hexagon bolster for extra power

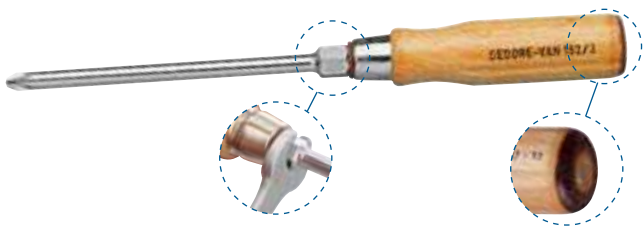

Code	No.	PH	M	mm	mm	mm	mm	mm
6429400	<b>162 1</b>	1	M 2 - M 3	80	180	6	58	5
6429590	<b>162 2</b>	2	M 3,5 - M 5	100	210	10	96	5
6429670	<b>162 3</b>	3	M 6	150	275	12	172	5
6429750	<b>162 4</b>	4	M 8 - M 10	200	340	17	325	5

**147-04**

**SCREWDRIVER SET 4 pieces**

- ✔ Work-orientated assortment packed in environmentally-friendly cardboard box
- ✔ Blade tanged right through the handle, chrome-plated
- ✔ GEDORE vanadium steel 50CrV4
- ✔ Hardwood handle, clear varnished with leather cap
- ✔ Hexagon bolster for extra power




Code	No.	Contents	mm	mm
6422820	<b>147-04</b>	⊖ 147 5,5 7 9 10	585	1

**147-162-05**

**SCREWDRIVER SET 5 pieces**

- ✔ Work-orientated assortment packed in environmentally-friendly cardboard box
- ✔ Blade tanged right through the handle, chrome-plated
- ✔ GEDORE vanadium steel 50CrV4
- ✔ Hardwood handle, clear varnished with leather cap
- ✔ Hexagon bolster for extra power

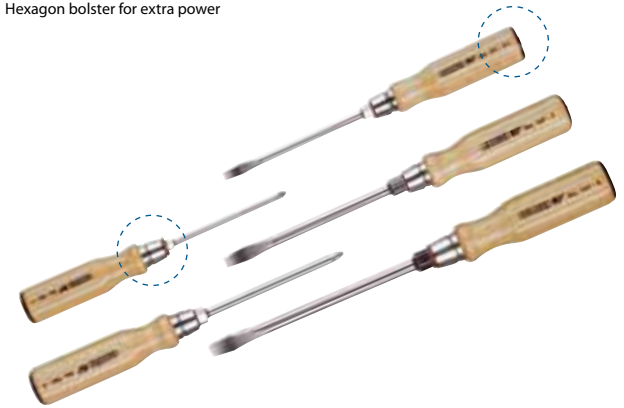

Code	No.	Contents	mm	mm
6423120	<b>147-162-05</b>	⊖ 147 5,5 7 9 ⊕ 162 1 2	535	1

**ELECTRONIC SCREWDRIVER**

**171 IS**

**ELECTRONIC SCREWDRIVER for slotted head screws**

- ✔ Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- ✔ Tip additionally coated for highest precision and corrosion protection
- ✔ 2-component-handle in ergonomic design
- ✔ Pivoting end cap with micro anti-slip surface
- ✔ Colour coding of the drive type



Code	No.	mm <sub>±</sub>	mm	mm	mm	mm	mm
1845004	<b>171 IS 1,2</b>	1.2	60	155	2,5	17	5
6436450	<b>171 IS 1,5</b>	1.5	60	155	2,5	14	5
1845012	<b>171 IS 1,8</b>	1.8	60	155	2,5	17	5
6438660	<b>171 IS 2</b>	2.0	60	155	2,5	17	5
1845020	<b>171 IS 2,5</b>	2.5	75	170	2,5	20	5
1845039	<b>171 IS 3</b>	3.0	100	195	3,0	23	5



### 165 PH

#### ELECTRONIC SCREWDRIVER for cross-slotted head screws PH

- Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- Tip additionally coated for highest precision and corrosion protection
- 2-component-handle in ergonomic design
- Pivoting end cap with micro anti-slip surface
- Colour coding of the drive type



Code	No.	PH	mm	mm	mm	mm	mm	mm
1845047	<b>165 PH 000</b>	000		60	155	2,5	18	5
6442770	<b>165 PH 00</b>	00		60	155	2,5	16	5
6442930	<b>165 PH 0</b>	0	M1,6 - M2	60	155	3,0	18	5
1845055	<b>165 PH 1</b>	1	M2-M3	80	175	4,5	31	5

### 165 TX

#### ELECTRONIC SCREWDRIVER for recessed TORX® head screws

- Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- Tip additionally coated for highest precision and corrosion protection
- 2-component-handle in ergonomic design
- Pivoting end cap with micro anti-slip surface
- Colour coding of the drive type
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	TX	mm	mm	mm	mm	mm	mm
1845098	<b>165 TX T3</b>	T3	M1,2 - M1,4	1.13	60	155	2,5	16
1845101	<b>165 TX T4</b>	T4	M1,4	1.29	60	155	2,5	16
1845128	<b>165 TX T5</b>	T5	M1,8	1.42	60	155	2,5	17
1845136	<b>165 TX T6</b>	T6	M2	1.69	60	155	3,0	19
1845144	<b>165 TX T7</b>	T7	M2,5	1.99	60	155	3,0	19
1845152	<b>165 TX T8</b>	T8	M2,5	2.31	60	155	3,0	19
1845160	<b>165 TX T9</b>	T9	M3	2.50	60	155	3,0	19
1845179	<b>165 TX T10</b>	T10	M3 - M3,5	2.74	60	155	3,0	20
1845187	<b>165 TX T15</b>	T15	M3,5 - M4	3.27	60	155	3,5	23
1845195	<b>165 TX T20</b>	T20	M4 - M5	3.86	80	175	4,0	29

### 164 IN

#### ELECTRONIC SCREWDRIVER for in-hex screws

- Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- Tip additionally coated for highest precision and corrosion protection
- 2-component-handle in ergonomic design
- Pivoting end cap with micro anti-slip surface
- Colour coding of the drive type



Code	No.	IN	mm	mm	mm	mm	mm	mm
1845063	<b>164 IN 0,7</b>	0,7	60	155	2,5	18	5	
1845071	<b>164 IN 0,9</b>	0,9	60	155	2,5	18	5	
6443150	<b>164 IN 1,3</b>	1,3	60	155	2,5	17	5	
6443230	<b>164 IN 1,5</b>	1,5	60	155	2,5	17	5	
6443310	<b>164 IN 2</b>	2,0	60	155	2,5	19	5	
6443580	<b>164 IN 2,5</b>	2,5	60	155	3,0	16	5	
6443740	<b>164 IN 3</b>	3,0	60	155	3,5	22	5	

### 165-171-06

#### ELECTRONIC SCREWDRIVER SET 6 pieces

- For slotted head and cruciform head screws PH
- Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- Tip additionally coated for highest precision and corrosion protection
- 2-component-handle in ergonomic design
- Pivoting end cap with micro anti-slip surface
- Colour coding of the drive type
- In plastic case
- With "Check-Tool-System": 2-colour plastic insert to check that the set is complete



Code	No.	Contents	mm	mm
1902849	<b>165-171-06</b>	⊕ 165 PH 000 00 0 ⊖ 171 IS 1,2 1,8 2,5	385	1



### 165 TX-06

#### ELECTRONIC SCREWDRIVER SET 6 pieces

- For recessed TORX® head screws
- Blade in high-alloy chrome-vanadium-molybdenum steel, chrome-plated
- Tip additionally coated for highest precision and corrosion protection
- 2-component-handle in ergonomic design
- Pivoting end cap with micro anti-slip surface
- Colour coding of the drive type
- In plastic case
- With "Check-Tool-System": 2-colour plastic insert to check that the set is complete
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	Contents	mm	mm
1902857	<b>165 TX-06</b>	⊕ 165 TX T5 T6 T7 T8 T9 T10	415	1

### 1021

#### ELECTRONIC SCREWDRIVER SET 7 pieces

- In plastic case



Code	No.	Contents	mm	mm
6601830	<b>1021</b>	⊖ 171 IS 1,2 1,5 2 ⊕ 165 PH 00 0 8305-2 8306-5	624	1




**HEXAGON ALLEN KEYS**

**42 T**

**HEXAGON ALLEN KEY WITH T-HANDLE**

for in-hex screws

- Blue handle with hanging hole
- GEDORE vanadium steel 61CrSiV5, chromated



mm


Code	No.	mm	L <sub>1</sub>	L <sub>2</sub>	±	⊞
1531360	<b>42 T 2</b>	2.0	162.5	130	29	10
6354130	<b>42 T 2,5</b>	2.5	192.5	160	36	10
6353670	<b>42 T 3</b>	3.0	222.5	190	40	10
6353750	<b>42 T 4</b>	4.0	249.0	210	73	10
6353830	<b>42 T 5</b>	5.0	279.0	240	93	10
6353910	<b>42 T 6</b>	6.0	309.0	270	124	10
6366730	<b>42 T 7</b>	7.0	329.0	290	157	10
6354050	<b>42 T 8</b>	8.0	349.0	310	198	10
6354210	<b>42 T 10</b>	10.0	369.0	330	295	10

**42 T**

**HEXAGON ALLEN KEY WITH T-HANDLE**

for in-hex screws

- Blue handle with hanging hole
- GEDORE vanadium steel 61CrSiV5, chromated




"AF"

Code	No.	AF	L <sub>1</sub>	L <sub>2</sub>	±	⊞
1996010	<b>42 T 1/8AF</b>	1/8	229	190	40	1
1996029	<b>42 T 5/32AF</b>	5/32	249	210	68	1
1996037	<b>42 T 3/16AF</b>	3/16	279	240	88	1
1996045	<b>42 T 1/4AF</b>	1/4	309	270	120	1
1996053	<b>42 T 5/16AF</b>	5/16	349	310	190	1
1996061	<b>42 T 3/8AF</b>	3/8	369	330	230	1

**DT 42**

**HEXAGON ALLEN KEY WITH T-HANDLE**

- Blue handle with hanging hole
- With 2 hexagons, same size each end



mm

Code	No.	mm	L <sub>1</sub>	L <sub>2</sub>	L <sub>3</sub>	±	⊞
1476408	<b>DT 42 2</b>	2.0	107.0	87	12.0	12	10
1476424	<b>DT 42 2,5</b>	2.5	127.0	107	12.0	15	10
1476432	<b>DT 42 3</b>	3.0	147.0	127	12.0	19	10
1476440	<b>DT 42 4</b>	4.0	173.5	141	15.5	49	10
1476459	<b>DT 42 5</b>	5.0	193.5	161	17.5	68	10
1476467	<b>DT 42 6</b>	6.0	213.5	181	20.5	91	10
1476475	<b>DT 42 7</b>	7.0	231.0	192	28.0	142	10
1476483	<b>DT 42 8</b>	8.0	246.0	207	28.0	175	10
1476491	<b>DT 42 10</b>	10.0	261.0	222	28.0	257	10

[www.gedore.com](http://www.gedore.com)

**DTT 42**

**TRI-T HEXAGON ALLEN KEY**

- With 3 hexagons, same size each end
- T-handle fixed



mm

Code	No.	mm	L <sub>1</sub>	L <sub>2</sub>	Ø	±	⊞
1669540	<b>DTT 42 3</b>	3	150	75	5.0	42	1
1669559	<b>DTT 42 4</b>	4	180	90	6.0	64	1
1669567	<b>DTT 42 5</b>	5	180	90	7.0	92	1
1669575	<b>DTT 42 6</b>	6	210	105	8.0	134	1
1669583	<b>DTT 42 8</b>	8	250	125	9.5	224	1
1669591	<b>DTT 42 10</b>	10	300	150	12.0	418	1





## Hexagon Allen Keys

- From GEDORE vanadium steel 61CrSiV5
- Self-designed/built machines from GEDORE's Special Machinery Construction section take up that precision-based manufacturing
- In a similar manner as with hot forging, the fibre course of the steel is not interrupted and thus retains its full strength, toughness and flexibility
- Professional tempering ensures a long service life
- Chamfered nose ends facilitate insertion into the screw head




42

### HEXAGON ALLEN KEY for in-hex screws

- Acc. to DIN ISO 2936
- GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 12 mm, chrome-plated up from size 14 mm

mm

Code	No.	mm	L <sub>1</sub>	L <sub>2</sub>	±	⊞
6342200	<b>42 0,7</b>	0.7	33.0	7.0	1	10
6342390	<b>42 0,9</b>	0.9	33.0	11.0	1	10
6342470	<b>42 1,3</b>	1.3	41.0	13.0	1	10
6340260	<b>42 1,5</b>	1.5	46.5	15.5	1	10
6340340	<b>42 2 (5/64AF)</b>	2.0	52.0	18.0	2	10
6340420	<b>42 2,5</b>	2.5	58.5	20.5	4	10
6340500	<b>42 3</b>	3.0	66.0	23.0	6	10
6340690	<b>42 4</b>	4.0	74.0	29.0	11	10
6340770	<b>42 5</b>	5.0	85.0	33.0	19	10
6344840	<b>42 7/32AF (5,5MM)</b>	5.56	82.0	32.0	22	10
6340850	<b>42 6</b>	6.0	96.0	38.0	31	10
6340930	<b>42 7</b>	7.0	102.0	41.0	44	10
6341070	<b>42 8</b>	8.0	108.0	44.0	61	10
6341150	<b>42 9</b>	9.0	114.0	47.0	81	10
6341230	<b>42 10</b>	10.0	122.0	50.0	106	10
6341310	<b>42 12</b>	12.0	137.0	57.0	169	10
6341580	<b>42 14</b>	14.0	154.0	70.0	266	10
6341660	<b>42 17</b>	17.0	177.0	80.0	430	10
6341740	<b>42 19</b>	19.0	199.0	89.0	602	10
6341820	<b>42 22</b>	22.0	222.0	102.0	907	10
6341900	<b>42 24</b>	24.0	248.0	114.0	1211	5
6342550	<b>42 27</b>	27.0	277.0	127.0	1711	5
6342630	<b>42 30</b>	30.0	315.0	142.0	2423	1
6342710	<b>42 32</b>	32.0	347.0	157.0	3010	1



### HEXAGON ALLEN KEY for in-hex screws

- GEDORE vanadium steel 61CrSiV5, zinc-plated up to size 1/2", chrome-plated up from size 9/16"

AF

Code	No.	AF	L <sub>1</sub>	L <sub>2</sub>	±	⊞
6342120	<b>42 3/64AF</b>	3/64	41.0	13.0	2	10
6342040	<b>42 1/16AF</b>	1/16	46.5	15.5	2	10
6344330	<b>42 3/32AF</b>	3/32	56.5	20.5	4	10
6340340	<b>42 2 (5/64AF)</b>		52.0	18.0	2	10
6344410	<b>42 1/8AF</b>	1/8	60.0	23.0	6	10
6344680	<b>42 5/32AF</b>	5/32	67.0	26.0	10	10
6344760	<b>42 3/16AF</b>	3/16	73.0	30.0	15	10
6344840	<b>42 7/32AF (5,5MM)</b>	7/32	82.0	32.0	22	10
6344920	<b>42 1/4AF</b>	1/4	92.0	36.5	35	10
6345060	<b>42 5/16AF</b>	5/16	102.0	43.0	59	10
6345140	<b>42 3/8AF</b>	3/8	115.0	49.0	94	10
6345220	<b>42 1/2AF</b>	1/2	142.0	61.0	205	10
6345300	<b>42 9/16AF</b>	9/16	154.0	66.0	274	10
6345490	<b>42 5/8AF</b>	5/8	168.0	76.0	376	5
6345570	<b>42 3/4AF</b>	3/4	199.0	89.0	309	5





**42 EL**

**HEXAGON ALLEN KEY for in-hex screws, extra long**

- ▲ Acc. to DIN ISO 2936
- ▲ GEDORE vanadium steel 61CrSiV5, zinc-plated



mm

Code	No.	mm	L <sub>1</sub>	L <sub>2</sub>	mm	mm
6350810	<b>42 EL 2 (5/64AF)</b>	2.0	102.0	18.0	4	10
6351030	<b>42 EL 2,5</b>	2.5	114.5	20.5	7	10
6351110	<b>42 EL 3</b>	3.0	129.0	23.0	10	10
6351380	<b>42 EL 4</b>	4.0	144.0	29.0	19	10
6351460	<b>42 EL 5</b>	5.0	165.0	33.0	33	10
1543342	<b>42 EL 7/32AF (5,5MM)</b>	5.56	186.0	38.0	47	10
6351540	<b>42 EL 6</b>	6.0	186.0	38.0	54	10
6351620	<b>42 EL 8</b>	8.0	208.0	44.0	104	10
6351700	<b>42 EL 10</b>	10.0	234.0	50.0	184	10
6351890	<b>42 EL 12</b>	12.0	262.0	57.0	293	10
6351970	<b>42 EL 14</b>	14.0	294.0	70.0	453	10

**HEXAGON ALLEN KEY for in-hex screws, extra long**

- ▲ GEDORE vanadium steel 61CrSiV5, zinc-plated



Code	No.	AF	L <sub>1</sub>	L <sub>2</sub>	mm	mm
6350810	<b>42 EL 2 (5/64AF)</b>	5/64	102.0	18.0	4	10
1543377	<b>42 EL 3/32AF</b>	3/32	114.5	20.5	6	10
1543318	<b>42 EL 1/8AF</b>	1/8	129.0	23.0	11	10
1543326	<b>42 EL 5/32AF</b>	5/32	144.0	29.0	19	10
1543334	<b>42 EL 3/16AF</b>	3/16	165.0	33.0	30	10
1543342	<b>42 EL 7/32AF (5,5MM)</b>	7/32	186.0	38.0	47	10
1543369	<b>42 EL 1/4AF</b>	1/4	197.0	41.0	65	10
1543350	<b>42 EL 5/16AF</b>	5/16	208.0	44.0	103	10
1543385	<b>42 EL 3/8AF</b>	3/8	234.0	50.0	167	10
1543393	<b>42 EL 1/2AF</b>	1/2	277.0	63.0	355	10
1543407	<b>42 EL 9/16AF</b>	9/16	294.0	70.0	475	10

**42 KEL**

**HEXAGON ALLEN KEY for in-hex screws, extra long, with ball end**

- ▲ GEDORE vanadium steel 59CrV4, chrome-plated



mm

Code	No.	mm	L <sub>1</sub>	L <sub>2</sub>	mm	mm
1563556	<b>42 KEL 1,5</b>	1.5	91.5	15.5	3	10
6370090	<b>42 KEL 2</b>	2.0	102.0	18.0	4	10
6370170	<b>42 KEL 2,5</b>	2.5	114.5	20.5	6	10
6370250	<b>42 KEL 3</b>	3.0	129.0	23.0	10	10
6370330	<b>42 KEL 4</b>	4.0	144.0	29.0	19	10
6370410	<b>42 KEL 5</b>	5.0	165.0	33.0	33	10
6370680	<b>42 KEL 6</b>	6.0	186.0	38.0	53	10
1729241	<b>42 KEL 7</b>	7.0	197.0	41.0	76	10
6370760	<b>42 KEL 8</b>	8.0	208.0	44.0	103	10
6370840	<b>42 KEL 10</b>	10.0	234.0	50.0	179	10
6370920	<b>42 KEL 12</b>	12.0	262.0	57.0	287	10

**42 Z**

**HEXAGON ALLEN KEY with pilot, for in-hex screws**

- ▲ Acc. to DIN 6911
- ▲ Chrome-vanadium steel, zinc-plated
- ▲ \* not standardised



mm

Code	No.	*	mm	L <sub>1</sub>	L <sub>2</sub>	mm	mm
6342980	<b>42 Z 3</b>		3	63	20	6	5
6343010	<b>42 Z 4</b>		4	70	25	10	5
6343280	<b>42 Z 5</b>		5	80	28	19	5
6343360	<b>42 Z 6</b>		6	90	32	31	5
6343440	<b>42 Z 7</b>	*	7	95	34	42	5
6343520	<b>42 Z 8</b>		8	100	36	58	5
6343600	<b>42 Z 10</b>		10	112	40	100	5
6343790	<b>42 Z 12</b>		12	125	45	162	5
6343870	<b>42 Z 14</b>		14	140	56	254	5
6343950	<b>42 Z 17</b>		17	160	63	418	1
6344090	<b>42 Z 19</b>		19	180	70	584	1

**42**

**HEXAGON ALLEN KEY SET for in-hex screws**

- ▲ In blue PVC wallet
- ▲ GEDORE vanadium steel 61CrSiV5, zinc-plated



mm

Code	No.	Contents	mm	mm
6347510	<b>42-07</b>	2 2,5 3 4 5 6 8	144	1
6349050	<b>42-70</b>	2,5 3 4 5 6 8 10	254	1
6347780	<b>42-08</b>	3 4 5 6 8 10 12 14	716	1
6347860	<b>42-09</b>	2 2,5 3 4 5 6 7 8 10	297	1

**HEXAGON ALLEN KEY SET for in-hex screws**

- ▲ In blue PVC wallet
- ▲ GEDORE vanadium steel 61CrSiV5, zinc-plated



Code	No.	Contents	mm	mm
6348750	<b>42-07 A</b>	5/64 3/32 1/8 5/32 3/16 7/32 1/4"	103	1
6348830	<b>42-08 A</b>	1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16"	731	1
6348910	<b>42-09 A</b>	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	257	1





### H 42 - H 42 KEL

#### HEXAGON ALLEN KEY SET for in-hex screws


- ▶ In blue plastic holder (LPDE)
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated
- ▶ Execution KEL with ball end
- ▶ GEDORE vanadium steel 59CrV4, chromated



H 42-10



H 42 EL-88

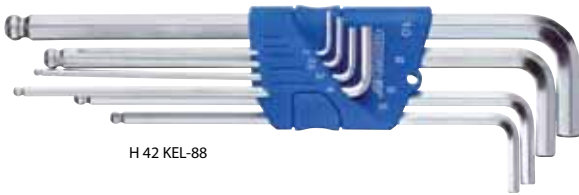

H 42 KEL-88

mm

Code	No.	Contents	🔧	📦
1505408	<b>H 42-10</b>	1,3 1,5 2 2,5 3 4 5 6 8 10	259	1
1505416	<b>H 42 EL-88</b>	2 2,5 3 4 5 6 8 10	425	1
1523988	<b>H 42 KEL-88</b>	2 2,5 3 4 5 6 8 10	415	1

#### HEXAGON ALLEN KEY SET for in-hex screws

- ▶ In blue plastic holder (LPDE)
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated

"AF"

Code	No.	Contents	🔧	📦
1505424	<b>H 42-88 A</b>	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	172	1
1543555	<b>H 42 EL-88 A</b>	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16"	300	1

### PH 42-88

#### HEXAGON ALLEN KEY SET for in-hex screws

- ▶ In blue plastic holder
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated



mm

Code	No.	Contents	🔧	📦
6352000	<b>PH 42-88</b>	2 2,5 3 4 5 6 8 10	245	1

### S 42

#### HEXAGON ALLEN KEY SET for in-hex screws

- ▶ On key ring with quick release
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated



mm

Code	No.	Contents	🔧	📦
6347430	<b>S 42-07</b>	2 2,5 3 4 5 6 8	162	1

#### HEXAGON ALLEN KEY SET for in-hex screws

- ▶ On key ring with quick release
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated

"AF"

Code	No.	Contents	🔧	📦
6348160	<b>S 42-09 A</b>	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16 3/8"	273	1



### SCL 42

#### HEXAGON ALLEN KEY SET for in-hex screws

- ▶ In robust metal clip
- ▶ Execution K with ball end
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated



mm

Code	No.	Contents	🔧	📦
6347350	<b>SCL 42-70</b>	2,5 3 4 5 6 8 10	360	1
6371140	<b>SCL 42 K-70</b>	2,5 3 4 5 6 8 10	361	1

#### HEXAGON ALLEN KEY SET for in-hex screws

- ▶ In robust metal clip
- ▶ GEDORE vanadium steel 61CrSiV5, zinc-plated

"AF"


Code	No.	Contents	🔧	📦
6354800	<b>SCL 42-90 A</b>	5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4"	260	1



**42 TX**

**WRENCH KEY WITH T-HANDLE for recessed TORX® screws**

- Blue handle with hanging hole
- Chrome-vanadium steel, blade chrome-plated, tip gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Code	No.	✳	▮	✳mm	L <sub>1</sub>	L <sub>2</sub>	↕	📦
1531328	<b>42 TX T5</b>	T5	M1,8	1.42	107.0	87	18	10
1531336	<b>42 TX T6</b>	T6	M2	1.70	107.0	87	18	10
1531344	<b>42 TX T7</b>	T7	M2,5	1.99	107.0	87	18	10
1531352	<b>42 TX T8</b>	T8	M2,5	2.31	119.5	87	33	10
6361180	<b>42 TX T9</b>	T9	M3	2.50	139.5	107	38	10
6362070	<b>42 TX T10</b>	T10	M3 - M3,5	2.74	139.5	107	41	10
6362820	<b>42 TX T15</b>	T15	M3,5 - M4	3.27	159.5	127	42	10
6362900	<b>42 TX T20</b>	T20	M4 - M5	3.86	173.5	141	43	10
6365330	<b>42 TX T25</b>	T25	M4,5 - M5	4.43	180.0	141	64	10
6365410	<b>42 TX T27</b>	T27	M4,5 - M6	4.99	200.0	161	84	10
6365680	<b>42 TX T30</b>	T30	M6 - M7	5.52	200.0	161	90	10
6365760	<b>42 TX T40</b>	T40	M7 - M8	6.65	220.0	181	115	5
6365840	<b>42 TX T45</b>	T45	M8 - M10	7.82	231.0	192	139	5
6365920	<b>42 TX T50</b>	T50	M10	8.83	246.0	207	181	5

**43 TX**

**CRANKED WRENCH KEY for recessed TORX® screws**

- Chrome-vanadium steel 50CrV4, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	✳	▮	✳mm	L <sub>1</sub>	L <sub>2</sub>	↕	📦
6363550	<b>43 TX T6</b>	T6	M2	1.69	42	16	3	5
6363630	<b>43 TX T7</b>	T7	M2,5	1.99	48	16	3	5
6363710	<b>43 TX T8</b>	T8	M2,5	2.31	48	16	4	5
6363980	<b>43 TX T9</b>	T9	M3	2.50	48	16	4	5
6364010	<b>43 TX T10</b>	T10	M3 - M3,5	2.74	51	17	5	5
6364280	<b>43 TX T15</b>	T15	M3,5 - M4	3.27	54	18	6	5
6364360	<b>43 TX T20</b>	T20	M4 - M5	3.86	57	19	8	5
6364440	<b>43 TX T25</b>	T25	M4,5 - M5	4.43	60	20	10	5
6364520	<b>43 TX T27</b>	T27	M4,5 - M6	4.99	64	21	16	5
6364600	<b>43 TX T30</b>	T30	M6 - M7	5.52	70	24	22	5
6364790	<b>43 TX T40</b>	T40	M7 - M8	6.65	76	26	31	5
6364870	<b>43 TX T45</b>	T45	M8 - M10	7.82	83	29	46	5
6364950	<b>43 TX T50</b>	T50	M10	8.83	95	32	60	5
6365090	<b>43 TX T55</b>	T55	M12	11.22	108	35	122	1
6365170	<b>43 TX T60</b>	T60	M14	13.25	120	38	187	1

**VDE 42**



505

**43 KTX**

**CRANKED WRENCH KEY for recessed TORX® screws, with ball end**

- Working angle approx. 25°
- Chrome-vanadium steel, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	✳	▮	✳mm	L <sub>1</sub>	L <sub>2</sub>	↕	📦
6367110	<b>43 KTX T10</b>	T10	M3 - M3,5	2.74	73	17	6	5
6367380	<b>43 KTX T15</b>	T15	M3,5 - M4	3.27	83	17	9	5
6367460	<b>43 KTX T20</b>	T20	M4 - M5	3.86	94	18	12	5
6367540	<b>43 KTX T25</b>	T25	M4,5 - M5	4.43	96	18	15	5
6367620	<b>43 KTX T27</b>	T27	M4,5 - M6	4.99	106	20	24	5
6367700	<b>43 KTX T30</b>	T30	M6 - M7	5.52	119	24	33	5
6367890	<b>43 KTX T40</b>	T40	M7 - M8	6.65	132	26	49	5

**43 TX-09**

**CRANKED WRENCH KEY SET for recessed TORX® screws**

- In blue PVC wallet
- Chrome-vanadium steel 50CrV4, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA




Code	No.	Contents	↕	📦
6360960	<b>43 TX-09</b>	T7 T8 T9 T10 T15 T20 T25 T30 T40	115	1

**H 43 TX - H 43 KTX**

**CRANKED WRENCH KEY SET for recessed TORX® screws**

- In blue LDPE holder
- Execution KTX with ball end
- Chrome-vanadium steel 50CrV4, gun-metal finish
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

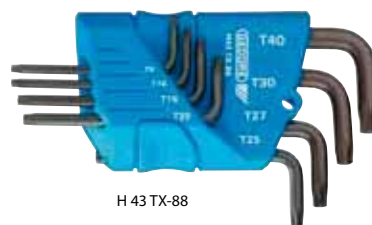

H 43 TX-88



H 43 KTX-07

Code	No.	Contents	↕	📦
1531417	<b>H 43 TX-09</b>	T7 T8 T9 T10 T15 T20 T25 T30 T40	120	1
1531425	<b>H 43 TX-88</b>	T9 T10 T15 T20 T25 T27 T30 T40	129	1
1531433	<b>H 43 TX-08</b>	T10 T15 T20 T25 T27 T30 T40 T45	168	1
1531441	<b>H 43 KTX-07</b>	T10 T15 T20 T25 T27 T30 T40	169	1



### SCL 43 TX-80

#### CRANKED WRENCH KEY SET for recessed TORX® screws

- ▶ In robust metal clip
- ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA





Code	No.	Contents	🔧	📦
6346460	<b>SCL 43 TX-80</b>	T9 T10 T15 T20 T25 T27 T30 T40	286	1

### DT 43 KTX

#### CRANKED WRENCH KEY WITH T-HANDLE for recessed TORX® screws

- ▶ Working angle approx. 25°
- ▶ Blue handle with hanging hole
- ▶ Chrome-vanadium steel, blades chrome-plated, tip phosphated
- ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA

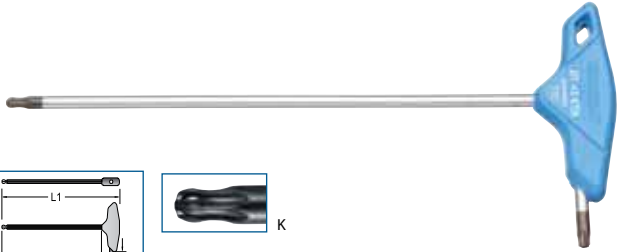

Code	No.	🔧	📏	📏	📏	📏	🔧	📦	
1505521	<b>DT 43 KTX T10</b>	T10	M3 - M3,5	2.74	150.0	130	12.0	24	1
1505548	<b>DT 43 KTX T15</b>	T15	M3,5 - M4	3.27	170.0	150	12.0	27	1
1505556	<b>DT 43 KTX T20</b>	T20	M4 - M5	3.86	202.5	170	15.5	58	1
1505564	<b>DT 43 KTX T25</b>	T25	M4,5 - M5	4.43	222.5	190	17.5	67	1
1505572	<b>DT 43 KTX T27</b>	T27	M4,5 - M6	4.99	242.5	210	20.0	94	1
1505580	<b>DT 43 KTX T30</b>	T30	M6 - M7	5.52	279.0	240	28.0	126	1
1505599	<b>DT 43 KTX T40</b>	T40	M7 - M8	6.65	309.0	270	28.0	171	1



### 708

#### TORX® GAUGE

- ▶ Easy identification of TORX® sizes, internal E4-E16, external T10-T60
- ▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA





Code	No.	Contents	🔧	📦
1394428	<b>708</b>	🔧 E4 - E16 📏 T10 - T60	22	1

Deviant packing units see article description.

### 42 X

#### CRANKED ALLEN SOCKET SCREWDRIVER

- for multi-point screws INBUS®XZN
- ▶ Acc. to DIN 65253, tips acc. to DIN 2325
- ▶ GEDORE vanadium steel 50CrV4, chromated

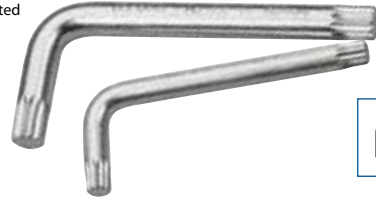


Code	No.	📏	L <sub>1</sub>	L <sub>2</sub>	🔧	📦
1531212	<b>42 X 4</b>	M 4	63	20	9	5
6350060	<b>42 X 5</b>	M 5	75	30	15	5
6350140	<b>42 X 6</b>	M 6	86	34	25	5
6350220	<b>42 X 8</b>	M 8	98	40	43	5
6350300	<b>42 X 10</b>	M 10	110	46	85	5
6350490	<b>42 X 12</b>	M 12	124	52	124	5
6350570	<b>42 X 14</b>	M 14	139	59	191	5
6350650	<b>42 X 16</b>	M 16	156	72	308	5
6350730	<b>42 X 18</b>	M 18	178	81	333	1



### 43

#### CRANKED WRENCH KEY for multi-spline screws RIBE®

- ▶ GEDORE vanadium steel 50CrV4, chromated
- ▶ RIBE® = reg. trademark of Richard Bergner GmbH & Co. KG, Schwabach, Germany



Code	No.	📏	L <sub>1</sub>	L <sub>2</sub>	🔧	📦
6352270	<b>43 5</b>	M 5	71	25	16	5
6352350	<b>43 6</b>	M 6	80	28	25	5
6352430	<b>43 8</b>	M 8	90	32	49	5
6352510	<b>43 10</b>	M 10	100	36	84	5
6352780	<b>43 12</b>	M 12	112	40	135	5
6352860	<b>43 14</b>	M 14	125	45	203	5

### 173

#### CRANKED SCREWDRIVER for slotted head screws

- ▶ Acc. to DIN 5200, blade tips acc. to DIN ISO 2380-2
- ▶ Chrome-vanadium steel, matt nickel-plated



Code	No.	mm; 📏	mm; 📏	📏	🔧	📦
6437180	<b>173 3,5</b>	3.5	0.6	90	10	5
6437850	<b>173 4</b>	4.0	0.8	100	13	10
6436100	<b>173 5,5</b>	5.5	1.0	125	25	10
6436370	<b>173 8</b>	8.0	1.2	150	50	10
6437930	<b>173 10</b>	10.0	1.6	175	87	5
6436530	<b>173 12</b>	12.0	2.0	200	127	5

### 174

#### CRANKED SCREWDRIVER for cross-slotted head screws PH

- ▶ Acc. to DIN 5208, tips acc. to DIN ISO 8764-1 PH
- ▶ Chrome-vanadium steel, matt nickel-plated



Code	No.	🔧 PH	📏	📏	🔧	📦
6436880	<b>174 1</b>	1-2	M2 - M5	100	29	10
6436960	<b>174 3</b>	3-4	M6 - M10	200	121	5





**TORQUE SCREWDRIVER**

**2140**

**TORQUE SCREWDRIVER HANDLE 0,6-5,4 N-m**

- Adjustable, with tactile impulse and audible signal
- For guaranteed controlled screw tightening in the range of 0,6 - 5,4 N-m
- With test certificate acc. to DIN EN ISO 6789, traceable to national standards
- Including hexagon socket key set 42 6 mm
- Actuation accuracy:
  - model 2140 1,5 NM: +/- 10% tolerance of the set value
  - model 2140 3,0 NM and 2140 5,4 NM: +/- 6% tolerance of the set value



Code	No.	Nm	↳mm↳	↳mm↳	↳mm↳	↳mm↳
1802364	<b>2140 1,5 NM</b>	0,6-1,5	108	0,1	145	1
1802372	<b>2140 3,0 NM</b>	1,5-3,0	108	0,1	147	1
1802380	<b>2140 5,4 NM</b>	3,0-5,4	108	0,2	152	1

**2141 IS**

**PLUG-IN BLADE 1/4" HEX for slotted head screws**



Code	No.	mm:↳	mm:↳	↳mm↳	↳mm↳	↳mm↳
1802453	<b>2141 IS 3</b>	3.0	0.5	170	42	1
1802461	<b>2141 IS 3,5</b>	3.5	0.6	170	43	1
1802488	<b>2141 IS 4</b>	4.0	0.8	170	43	1

**2141 PH**

**PLUG-IN BLADE HEX for cross-slotted head screws PH**



Code	No.	PH	↳mm↳	↳mm↳	↳mm↳	↳mm↳
1802496	<b>2141 PH 0</b>	0	M1,6 - M2	170	42	1
1802518	<b>2141 PH 1</b>	1	M2 - M3	170	44	1
1802526	<b>2141 PH 2</b>	2	M3,5 - M5	170	46	1



**Accessories**

Activating tools and screwdriver bits as well as adaptors are listed up from page



**227 - 228**

**2141 PZ**

**PLUG-IN BLADE HEX for cross-slotted head screws PZ**



Code	No.	PH	↳mm↳	↳mm↳	↳mm↳	↳mm↳
1802534	<b>2141 PZ 0</b>	0	M1,6 - M2	170	42	1
1802542	<b>2141 PZ 1</b>	1	M2 - M3	170	44	1
1802550	<b>2141 PZ 2</b>	2	M3,5 - M5	170	46	1

**2141 TX**

**PLUG-IN BLADE 1/4" HEX for recessed TORX® head screws**

▶ TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	PH	↳mm↳	↳mm↳	↳mm↳	↳mm↳	
1802569	<b>2141 TX T6</b>	T6	M2	1.69	170	42	1
1802577	<b>2141 TX T7</b>	T7	M2,5	1.99	170	42	1
1802585	<b>2141 TX T8</b>	T8	M2,5	2.31	170	42	1
1802593	<b>2141 TX T9</b>	T9	M3	2.50	170	42	1
1802607	<b>2141 TX T10</b>	T10	M3 - M3,5	2.74	170	42	1
1802615	<b>2141 TX T15</b>	T15	M3,5 - M4	3.27	170	44	1
1802623	<b>2141 TX T20</b>	T20	M4 - M5	3.86	170	45	1
1802631	<b>2141 TX T25</b>	T25	M4,5 - M5	4.43	170	46	1



**2141 IP**

**PLUG-IN BLADE 1/4" HEX for recessed TORX PLUS® head screws**

▶ TORX PLUS® = reg. trademark of Acument Intellectual Properties, LLC. USA



Code	No.	PH	↳mm↳	↳mm↳	↳mm↳	↳mm↳
1802658	<b>2141 6IP</b>	M2	-	170	42	1
1802666	<b>2141 7IP</b>	-	-	170	42	1
1802674	<b>2141 8IP</b>	M2,5 - M3	-	170	42	1
1802682	<b>2141 9IP</b>	-	-	170	42	1
1802690	<b>2141 10IP</b>	M3 - M3,5	-	170	42	1
1802704	<b>2141 15IP</b>	M3,5 - M4	-	170	44	1



### 2140

#### TORQUE SCREWDRIVER SET 25 pieces

- Ideal for working in a small torque range, e.g. electronics, precision mechanics
- GEDORE-Check-Tool system
- For screwdriver function simply add the 2C multi-handle with appropriate accessory
- Adjustable, with tactile impulse and audible signal
- For guaranteed controlled screw tightening in the range of 1,5-3 / 3-5,4 N-m
- With test certificate acc. to DIN EN ISO 6789, traceable to national standards
- Actuation accuracy: +/- 6% tolerance of the set value
- Delivered with test certificate and operating instructions



Code	No.	Contents	N-m	mm	mm	mm
1953761	2140-3,0-025	<ul style="list-style-type: none"> <li>680 4 6,5</li> <li>685 2 2,5 3 4 5 6</li> <li>690 0 1 2</li> <li>D 20 4 4,5 5 5,5 6 7 8 9 10</li> <li>42 6 673 L 676 699 L</li> </ul> 2140 3,0 N-m	1,5-3,0	595	1	
1802429	2140-5,4-025	<ul style="list-style-type: none"> <li>680 4 6,5</li> <li>685 2 2,5 3 4 5 6</li> <li>690 0 1 2</li> <li>D 20 4 4,5 5 5,5 6 7 8 9 10</li> <li>42 6 673 L 676 699 L</li> </ul> 2140 5,4 N-m	3,0-5,4	595	1	



For further models see product group Torque Tools 755 / 756



258 - 259

### VOLTAGE TESTER

#### 4610

##### CAR LIGHT TESTER

- For testing 6-24 Volt
- Compact brass model
- With cable and alligator crimp



Code	No.	mm	mm	mm	mm
6698570	4610	125	69	10	

#### 4611

##### VOLTAGE TESTER

- For 6-24 Volt
- With cable and alligator crimp



Code	No.	mm	mm	mm	mm
6698650	4611	3	55	115	26 10

#### 4615

##### VOLTAGE TESTER

- For 220-250 Volt AC
- Blade nickel-plated, fully insulated blade conforming to DIN VDE 0680-6
- Handle and insulation in GEDORE blue
- 4615 3 with metal clip and grey cap



Code	No.	mm	mm	mm	mm	mm
6699110	4615 3	0.5	3.0	60	140	22 10
6699380	4615 3,5	0.6	3.5	90	180	37 10

### VARIOUS

#### 149

##### MAGNETIZER AND DEMAGNETIZER

- Magnetizes or demagnetizes screwdrivers, tweezers and similar tools made from steel
- Blue housing, made from high-quality plastic, unbreakable, cadmium-free



Code	No.	L	H	W	mm	mm
6416500	149	52	26	50	88	1

#### 156 S

##### SQUARE BLADED AWL

- Blue handle with hanging hole
- Blade bright nickel-plated



Code	No.	mm	mm	mm	mm
6424520	156 S	100	200	84	10