





FOR ALL OCCASIONS –



## ++ THE IDEAL TOOL ++



FILES



464

SAWS



465

PARALLEL VICES



466

MEASURING TOOLS



466 - 468

THREAD WORKINGS



468 - 469

VARIOUS



469



TOOLS FOR BICYCLES



470 - 471

INDUSTRIAL CUTLERY



472 - 475

SCREW CLAMPS



476 - 479

WORK LIGHTS



480 - 483

AT WORK



484 - 487



**FILES**

**8729**

**CONTACT FILE**

- ▶ In blue PVC tear-off wallet




Code	No.	« inch »	« mm »	Cut	↕	📦
6771080	<b>8729</b>	6	150	2	9	10

**8728**

**KEY FILE SET 6 pieces**

- ▶ Acc. to DIN 7283
- ▶ In blue plastic wallet



Code	No.	5 types	Cut	↕	📦
6771910	<b>8728</b>	■ ▲ ● ◐ ◑	2	150	1

**8730**

**DEBURRER**

- ▶ A valuable helper for removing burr on a wide range of different materials
- ▶ The small, free-turning deburring knife adjusts to the contour of the workpiece and removes burr

▶ **Consisting of:**

- 676 Driving handle
- 699 Bit holder
- E-8730 Deburrer bit 1/4" hex

6,3

1/4



Code	No.	Description	↕	📦
2190907	<b>8730</b>	Deburrer	90	1
2190915	<b>E-8730</b>	Deburrer bit 1/4" hex	5	1

**8701**

**HAND FILE**

- ▶ PVC handle
- ▶ DIN 7261, Form A
- ▶ Cut: 2



Code	No.	L	L'	W	H	Cut	↕	📦
6768020	<b>8701 2-6</b>	150	6	16	4	2	96	1
6768100	<b>8701 2-8</b>	200	8	20	5	2	183	1
6768290	<b>8701 2-10</b>	250	10	25	6	2	323	1

**8719**

**TRIANGULAR FILE**

- ▶ PVC handle
- ▶ DIN 7261, Form C
- ▶ 2-6 = not standardised
- ▶ Cut: 2



Code	No.	L	L'	W	Cut	↕	📦
6769260	<b>8719 2-6</b>	150	6	10	2	81	1
6769340	<b>8719 2-8</b>	200	8	14	2	177	1
6769420	<b>8719 2-10</b>	250	10	17	2	304	1

**8722**

**ROUND FILE**

- ▶ PVC handle
- ▶ DIN 7261, Form F
- ▶ Cut: 2



Code	No.	L	L'	Ø	Cut	↕	📦
6770000	<b>8722 2-6</b>	150	6	6.0	2	57	1
6770190	<b>8722 2-8</b>	200	8	7.5	2	112	1
6770270	<b>8722 2-10</b>	250	10	9.5	2	186	1

**8725**

**HALF-ROUND BLUNT FILE**

- ▶ PVC handle
- ▶ DIN 7261, Form E
- ▶ Cut: 2



Code	No.	L	L'	W	H	Cut	↕	📦
6770350	<b>8725 2-6</b>	150	6	16	4.5	2	91	1
6770430	<b>8725 2-8</b>	200	8	20	6.0	2	170	1
6770510	<b>8725 2-10</b>	250	10	25	7.0	2	285	1

➔ **95 • 130**



**450  
447**

➔ **600 H**



**428**

➔ **420**



**538**



## SAWS

### 401

#### SMALL SAW FOR METAL

- Mini-hacksaw, bright nickel-plated
- Saw blade 401 A



Code	No.	↳mm↳	↳Inch↳	↕	☒
6500050	<b>401</b>	350	13.3/4	226	1
5500000	<b>401 A</b>	200		12	10

### 402

#### KEYHOLE SAW

- Metal handle with two replaceable saw blades: one for metal (402 A), one for wood (402 B)
- Handle enamelled silver



Code	No.	↳mm↳	↳Inch↳	↕	☒
6500130	<b>402</b>	380	14.3/8	221	1
5500190	<b>402 A</b>	260		62	5
5500270	<b>402 B</b>	280		50	1

### 403

#### HACKSAW

- Adjustable tubular steel frame
- For 10" and 12" hacksaw blades, complete with No. 403 A-405 A
- Saw blades single-sided (403 A-405 A) and double-sided (403 B-405 B)
- Handle enamelled



Code	No.	Description	↳mm↳	↳Inch↳	↕	☒
6500210	<b>403</b>	Hacksaw	410	18.1/2	411	1
5500350	<b>403 A-405 A</b>	Saw blade, single-sided			28	10
5500430	<b>403 B-405 B</b>	Saw blade, double-sided			41	10

### 404

#### SMALL SAW FOR METAL PUK

- Bright nickel-plated
- Saw blade 404 A-406 A



Code	No.	Description	↳mm↳	↳Inch↳	↕	☒
6500480	<b>404</b>	Small saw for metal PUK	290	11	107	1
5501080	<b>404 A-406 A</b>	Saw blade	145	3	10	

### 406

#### HOBBY SAW

- For wood and metal
- Made from flat bar, 10 x 5 mm, zinc-plated
- Glass-fibre reinforced plastic handle
- Reach 50 mm
- For use with junior hacksaw blades 145 mm
- Saw blade 404 A-406 A



Code	No.	Description	↳mm↳	↳Inch↳	↕	☒
6501020	<b>406</b>	Hobby saw	250	10	168	1
5501080	<b>404 A-406 A</b>	Saw blade	145		3	10



### 407

#### HACKSAW

- Very light hacksaw in pressure-cast aluminium
- Ergonomic soft rubber hand grips
- Fixing of the sawblade by simple turning the blue clamping element in the hand grip
- Clamping piece adjustable by 40°
- Saw blade bimetal 407 A



Code	No.	Description	↳mm↳	☒
1879375	<b>407</b>	Hacksaw	650	1
1879383	<b>407 A</b>	Saw blade bimetal	55	1



### 372

#### UNIVERSAL HAND SAW

- For PE-, PVC-, wood, copper and aluminium pipes
- Sawblade bimetal (break-proof), length 300 mm
- PE or PVC pipes can be cut flush to the wall
- The replaceable saw blade can be set to 5 positions at the handle
- Especially suited for flush cutting in confined spaces
- As the saw blade works on tension it permits maximum control on the saw for a straight cut
- Effortless fine cuts due to an extremely thin saw blade



Code	No.	Description	↕
1874853	<b>372012</b>	Universal hand saw 12 tpi	220
1874888	<b>372018</b>	Universal hand saw 18 tpi	220
1874896	<b>372026</b>	Universal hand saw 26 tpi	220
1874845	<b>372000</b>	Spare handle	165
1874918	<b>372112</b>	Saw blade 12 tpi	55
1874926	<b>372118</b>	Saw blade 18 tpi	55
1874934	<b>372126</b>	Saw blade 26 tpi	55



**PARALLEL VICES**

**409 - 410**

**PARALLEL VICE**

- ✔ Welded
- ✔ Compact design, with large anvil surface
- ✔ Protected vice spindle with rolled thread




Code	No.	mm	mm	mm	
6500800	<b>409</b>	100	100	7.0	1
6500990	<b>410</b>	150	150	16.4	1

**411**

**PARALLEL VICE**

- ✔ Sturdy design, with jaws, anvil plate and slides polished and induction hardened
- ✔ In heat-treated steel
- ✔ Stove enamelled blue

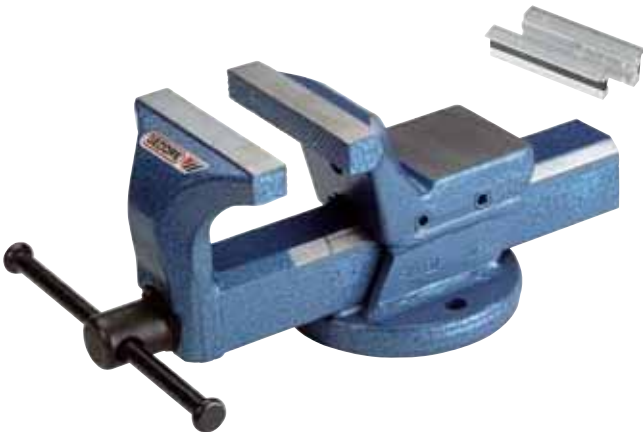

Code	No.	Description	mm	mm	mm	
6501100	<b>411-125</b>	Parallel vice 125x150 mm	125	150	12480	1
6501290	<b>411-150</b>	Parallel vice 150x200 mm	150	200	18474	1
5704430	<b>E-411 A-125</b>	Aluminium jaws 125 mm	125		186	1
5704510	<b>E-411 A-150</b>	Aluminium jaws 150 mm	150		218	1
5704270	<b>E-411 R-125</b>	Pipe-clamping jaws 125 mm	125		794	1
5704350	<b>E-411 R-150</b>	Pipe-clamping jaws 150 mm	150		778	1



**MEASURING TOOLS**

**4533**

**FOLDING RULE**

- ✔ Made of branch free beechwood with invisible metal fittings
- ✔ Riveted joint guarantees correct measurement even in humid or dry conditions
- ✔ With easy to read metric dual scale
- ✔ Accuracy class III
- ✔ EG-design approval for continuous mm division

**4533-1**

- ✔ Compact 1 m model
- ✔ Special for engineers, technicians, or businessmen
- ✔ Saves lots of place - suitable for jackets, suits or handbag
- ✔ Links 2.3 x 12 mm

**4533-2**

- ✔ Robust 2 m model with brass protective caps
- ✔ Most suitable for craftsmen or do-it-yourselfers
- ✔ Links 3.0 x 16 mm



Code	No.	Lm	mm	
1837079	<b>4533-1</b>	1	31	1
1837087	<b>4533-2</b>	2	86	1

**4534**

**STEEL TAPE MEASURE**

- ✔ With belt clip and rewind stop
- ✔ mm-divisions
- ✔ Approved standard mark



Code	No.	Lm	mm	mm	
6697920	<b>4534-3</b>	3	13	128	5
6698060	<b>4534-5</b>	5	19	220	5
6698140	<b>4534-8</b>	8	25	365	1

**702**

**FEELER GAUGE SET, FAN PATTERN**

- ✔ With protective handle, folding, blade length 100 mm
- ✔ **702 22 A + 702 26 A** each increasing by 1/1000"
- ✔ Handle nickel-plated



Code	No.	mm	mm		
6547520	<b>702 8 M</b>	5 10 15 20 25 30 40 50/100		37	5
6547600	<b>702 88 M</b>	3 4 5 6 7 8 9 10/100		27	5
6547790	<b>702 13 M</b>	5 10 15 20 25 30 40 50 60 70 80 90 100/100		65	10
6547870	<b>702 20 M</b>	5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100/100		100	10
6547950	<b>702 21 M</b>	10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50/100		68	5
6548250	<b>702 8 A</b>	.002 .004 .006 .008 .010 .012 .015 .020"		33	1
6548410	<b>702 11 A</b>	.0015 .002 .003 .004 .006 .008 .010 .012 .015 .020 .025"		38	1
6548680	<b>702 13 A</b>	.002 .003 .004 .005 .006 .008 .010 .012 .015 .020 .025 .030 .035"		55	5
6548760	<b>702 22 A</b>	.004 - .025"		81	5
6548840	<b>702 26 A</b>	.0015 - .025"		80	1

**703 M****VALVE FEELER GAUGE**

- Blade length 75 mm



Code	No.			
6549140	<b>703 M</b>	10 15 20 25 30 35 40/100	11	1

**705 M****SPARK PLUG GAUGE**

- With electrode adjuster, gauge wires in precision steel wire



Code	No.	$\varnothing$ mm			
6549570	<b>705 M</b>	40 50 60 70 75 80 90 100/100 mm	27	1	

**706****THREAD GAUGE**

- For metric and Whitworth threads
- Pitches 0.25-6.00 mm / 62-4 Step" W



Code	No.			
6549730	<b>706</b>	83	10	

**710****POCKET VERNIER CALLIPER**

- DIN 862, Form A 2
- For internal and external measurements, with polished tips, depth gauge and high-speed setting
- Graduated in mm and inches, vernier 1/20 and 1/128"
- In leather wallet



Code	No.	$\pm$ mm $\pm$	mm $\square$	"inch $\square$		
6555030	<b>710</b>	213	140	5.1/2	171	1

**710-80****VERNIER CALLIPER, SMALL**

- With inside and outside jaws, ground tips, depth gauge
- In leather pouch



Code	No.	$\pm$ mm $\pm$	mm $\square$	"inch $\square$		
1933205	<b>710-80</b>	114	80	3.1/8	100	1

**711****DIGITAL MEASURING CALLIPER**

- Stainless steel, hardened
- Switchable from mm to inch
- Accuracy: 0.03 mm - 0.001 inch
- Reading: 0.01 mm - 0.001 inch
- In sturdy protective case



Code	No.	$\pm$ mm $\pm$	mm $\square$	"inch $\square$		
6550070	<b>711</b>	230	153	6	408	1

**745****SCRIBER**

- Made from special steel



Code	No.	$\pm$ mm $\pm$		
6559530	<b>745</b>	250	58	10

**746****CARBIDE SCRIBER**

- Carbide, silver, with retractable, replaceable tip (E-746)



Code	No.	$\pm$ mm $\pm$		
6559610	<b>746</b>	140	22	10
5545100	<b>E-746</b>	35	2	1



**720**  
**TWEEZERS**  
 With angled tips  
 Bright nickel-plated

Code	No.	↳mm↳	↳mm↳	↳mm↳
6556270	<b>720</b>	150	25	5

**722-1 ESD**  
**PRECISION TWEEZERS ESD**  
 Flat, fine, long points  
 Satin non-glare finish  
 ESD = electrostatic discharge protection, black

Code	No.	↳mm↳	↳mm↳	↳mm↳
1881663	<b>722-1 ESD</b>	130	22	1

**722-3/-4**  
**ELECTRONIC TWEEZERS**  
 Curved, fine, long points  
 722-4 double curved  
 Satin non-glare finish

Code	No.	↳mm↳	↳mm↳	↳mm↳
1881698	<b>722-3</b>	122	16	1
1881701	<b>722-4</b>	122	16	1

**721**  
**CROSS TWEEZERS**  
 With straight tips  
 Bright nickel-plated

Code	No.	↳mm↳	↳mm↳	↳mm↳
6556350	<b>721</b>	160	33	1

**722-2**  
**PRECISION TWEEZERS**  
 Flat, fine points  
 Satin non-glare finish

Code	No.	↳mm↳	↳mm↳	↳mm↳
1881671	<b>722-2</b>	95	10	1

**722-5/-6**  
**WATCHMAKER TWEEZERS**  
 722-5 straight, fine, long points  
 722-6 bent, fine, long points  
 Satin non-glare finish

Code	No.	↳mm↳	↳mm↳	↳mm↳
1881728	<b>722-5</b>	108	12	1
1881736	<b>722-6</b>	108	10	1

**722-1**  
**PRECISION TWEEZERS**  
 Flat, fine, long points  
 Satin non-glare finish

Code	No.	↳mm↳	↳mm↳	↳mm↳
1881655	<b>722-1</b>	130	22	1



**THREAD WORKINGS**



**8552**  
**SCREW EXTRACTOR SET**  
 For extracting broken screws and bolts with threads M5 - M16  
 In handy plastic case, with twist drills, guide sleeves, extractor pins and extractor nuts  
 Dimensions: 200 x 120 x 38 mm  
 Complete with instructions

Code	No.	Contents	↳mm↳	↳mm↳
6755550	<b>8552-025</b>	Extractor pins size 1 2 3 4 5 Drilling sleeves 1 2 3 4 5 6 7 8 9 10 Extractor nuts size 10 11 13 14 17 Drills 8.7-11/32" 8-5/16" 6.4-1/4" 4.8-3/16" 3.2-1/8"	790	1



**140**  
**THREAD FILE**  
 For repairing damaged internal and external threads  
 Chrome-vanadium steel, ISO-nickel-plated  
 140 metric threads  
 140 A inch threads  
 140 W Whitworth threads

Code	No.	↳mm↳	for thread pitches	↳mm↳	↳mm↳
6409640	<b>140</b>	230	0.80 1.00 1.25 1.50 1.75 2.00 2.50 3.00 mm	125	1
6409720	<b>140 A</b>	230	24 20 18 16 14 13 12 11 inch	125	1
6409800	<b>140 W</b>	230	24 20 18 16 14 12 11 10 Whitworth	124	1

**8551**  
**BOLT EXTRACTOR**  
 Drill a central hole into the broken bolt (see table)  
 Turn the bolt extractor to the left into this hole until it grips and removes the bolt (penetrating oil may be necessary!)  
 Always choose the largest possible extractor size

Code	No.	↳mm↳	↳mm↳	Ø	Bore	↳mm↳	↳mm↳	↳mm↳
6758490	<b>8551 1</b>	M3 - M6	1/8-1/4	1,4-3,6	1,8	2,7	50	5 10
6758570	<b>8551 2</b>	M6 - M8	1/4-5/16	2,1-4,9	2,6	3,8	57	9 10
6758650	<b>8551 3</b>	M8 - M11	5/16-7/16	3,1-5,5	3,7	4,9	65	15 10
6758730	<b>8551 4</b>	M11 - M14	7/16-9/16	4,8-8,8	5,5	7,0	70	30 10
6758810	<b>8551 5</b>	M14 - M18	9/16-3/4	6,2-11,0	7,0	9,0	80	51 5
6759030	<b>8551 6</b>	M18 - M24	3/4-1	9,4-15,0	10,3	12,0	85	98 5
6759110	<b>8551 7</b>	M24 - M33	1-1.3/8	12,7-19,0	13,7	14,5	95	162 1
6759380	<b>8551 8</b>	M33 - M45	1.3/8-1.3/4	17,5-24,0	18,6	18,0	100	283 1

**8551****BOLT EXTRACTOR SET**

- ▶ In plastic case



Code	No.	Contents		
6759620	<b>8551-55</b>	1 2 3 4 5	117	1
6759700	<b>8551-66</b>	1 2 3 4 5 6	221	1
6759890	<b>8551-88</b>	1 2 3 4 5 6 7 8	724	1

**8553****TAP AND DIE SET**

- ▶ In plastic case
- ▶ For internal threads M3 - M6
- ▶ For external threads M3 - M6, max. 40 mm long
- ▶ Ratchet drive system with extension unit
- ▶ Additional guide sleeve for dies to ensure accurately aligned thread cutting along the bar axis, with swarf collector
- ▶ **Drives:** Ratchet with extension
- ▶ **Taps:** Quick-clamp tap wrench with M3-M6 taps
- ▶ **Dies:** Die handle with guide disc and M3-M6 dies
- ▶ **Accessories:** Fixing screws and angle screwdriver, instruction manual



Code	No.	Contents		
1939068	<b>8553</b>	T-handle ratchet 2093 U-3 T Hex socket key 2 mm Extension, 1/4" 4 mm Die holder Quick-clamp tap wrench Threaded stud M4x6 Backing washer Guide disc M3 M4 M5 M6 Dies M3 M4 M5 M6 Taps M3 M4 M5 M6	510	1

**VARIOUS****8272****UNIVERSAL PLIERS**

- ▶ With adjustable joint and protection against clamping
- ▶ Non-slip handles, slightly angled jaw position
- ▶ In heat-treated steel as per EN 10083



Code	No.	↳mm↳	↳inch↳		
6738620	<b>8272-165 C</b>	165	6	189	1
6738890	<b>8272-200 C</b>	200	8	259	1

**644 - 646****WIRE BRUSH**

- ▶ With untreated wooden handle, angled pattern, smooth, cast steel wire bristles



Code	No.	Execution	↳mm↳		
6531600	<b>644</b>	3-row	290	137	5
6531870	<b>646</b>	6-row	290	156	5

**645****FILE BRUSH**

- ▶ With carded cover and wooden handle
- ▶ Bristle field 110 x 40 mm



Code	No.	↳mm↳		
6531790	<b>645</b>	250	95	10

**228 - 220****526 - 528**





**TOOLS FOR BICYCLES**



**6002**

**WRENCH FOR SPOKES**

- ▶ Forged
- ▶ GEDORE vanadium steel 31CrV3, zinc-plated, chromated
- ▶ Applicable also for motorcycles



Code	No.	Ø mm	l mm	l mm	l mm
6451170	<b>6002 3,3</b>	3.3	30		1
6451410	<b>6002 3,5</b>	3.5	32		1
6451680	<b>6002 3,9</b>	3.9	32		1
6451760	<b>6002 4</b>	4.0	32		1
6451840	<b>6002 4,3</b>	4.3	32		1
6451920	<b>6002 4,5</b>	4.5	30		1
6452060	<b>6002 4,6</b>	4.6	28		1
6452140	<b>6002 4,8</b>	4.8	30		1
6452220	<b>6002 5</b>	5.0	32		1
6452300	<b>6002 5,2</b>	5.2	32		1
6452490	<b>6002 5,5</b>	5.5	30		1
6452570	<b>6002 5,7</b>	5.7	30		1
6452650	<b>6002 6,1</b>	6.1	28		1
6452730	<b>6002 6,5</b>	6.5	30		1

**6003**

**ALIGNING TOOLS FOR TREADLES**



Code	No.	l mm	l mm	l mm
6451250	<b>6003</b>	504	1140	1

**6004**

**HEXAGON SOCKET KEY**

- ▶ Designed for removal of the sprockets on SRAM rear wheels



Code	No.	Ø mm	l mm	l mm
6451330	<b>6004</b>	12	288	1



**6101**

**HUB CONE SPANNER**

- ▶ Very flat forged open end spanners for different screw couplings, head thickness 2.2 mm
- ▶ For SRAM hubs
- ▶ GEDORE vanadium steel 31CrV3, phosphated



Code	No.	Ø mm	l mm	l mm	l mm
1549146	<b>6101 13</b>	13	193	74	1
1549154	<b>6101 14</b>	14	193	78	1
1549162	<b>6101 15</b>	15	193	76	1
1549170	<b>6101 16</b>	16	193	76	1
1549189	<b>6101 17</b>	17	193	70	1
1549197	<b>6101 18</b>	18	193	76	1
1582038	<b>6101 19</b>	19	193	74	1
1809741	<b>6101 20</b>	20	193	74	1
6451090	<b>6101 22</b>	22	193	111	1

**6105**

**WRENCH FOR PEDALS**

- ▶ With same size each end and heads flat offset, head thickness 4.5 mm
- ▶ GEDORE vanadium steel 31CrV3, chrome-plated



Code	No.	l mm	Ø mm	l mm	l mm
1549138	<b>6105</b>	340	15	210	1

**6160**

**HANDLE FOR FITTINGS**



Code	No.	l mm	l mm	l mm
1560778	<b>6160</b>	180	320	1

**6161**

**FITTINGS PARING SPANNER**

- ▶ Tempered steel C45, chrome-plated



Code	No.	Ø mm	Ø	l mm	l mm	l mm
1560719	<b>6161</b>	36	41	126	149	1

**6162**

**FITTINGS**

- ▶ Tempered steel C45, chrome-plated



Code	No.	Ø mm	l mm	l mm	l mm
1560727	<b>6162 30</b>	30	124	159	1
1578537	<b>6162 32</b>	32	124	151	1
1578545	<b>6162 34</b>	34	124	148	1
1578553	<b>6162 35</b>	35	124	147	1
1578561	<b>6162 36</b>	36	124	144	1
1578588	<b>6162 40</b>	40	124	138	1
1578596	<b>6162 42</b>	42	124	135	1

**6163**

**FITTING OPEN ENDED SPANNER**

- ▶ Tempered steel C45, chrome-plated



Code	No.	Ø mm	l mm	l mm	l mm
1560735	<b>6163 15</b>	15	124	173	1

**6164**

**FITTING HOOK SPANNER**

- ▶ Tempered steel C45, chrome-plated



Code	No.	Ø	l mm	l mm	l mm
1560743	<b>6164</b>	44	124	137	1

**329001**

**SIPHON TRAP PLIERS / SPRING HOOK WRENCH**

- ▶ With plastic jaws



Code	No.	Ø mm	l mm	l mm	l mm
1984381	<b>329001</b>	20-65	230	300	1

**8386**

**CONNECTOR PLIERS**

- ▶ With lap joint
- ▶ 3 settings
- ▶ Protects sensitive surfaces
- ▶ Particularly suitable for Canon-Connectors or other screw connectors
- ▶ Plastic jaws bolted and replaceable (No. E-8386), jaw width 11 mm
- ▶ GEDORE high-performance hardened and tempered steel, chrome-plated
- ▶ Handles dip-insulated



Code	No.	mm	l mm	l mm
2003481	<b>8386</b>	20-60	300	1
2003694	<b>E-8386</b>			1



### 6166-18

#### BICYCLE COMPACT TOOL 18 pieces

- Compact tool with 18 functions
- Intelligent division into 2 halves, easy handling of all functions
- Rounded, flat shape reduces the risk of injury in crashes, when carried in the jersey pocket
- 2 tyre levers integrated in hafts
- Chain tool - for up to 10-plate chains
- Box wrench 8, 10mm
- Screwdriver slotted / cross-slotted PH
- Spoke wrench G14, G15
- INBUS® wrench 2\*, 2.5, 3, 4, 5, 6, 8
- TORX® wrench T20\*, T25
- \* Sizes supplied separately (for self-exchange)
- Made from Vanadium Plus steel
- Supplied in neoprene pouch for the jersey pocket, or carrying on a belt or saddle
- Dimensions: 98 x 50 x 25 mm
- TORX® = reg. trademark of Acument Intellectual Properties, LLC. USA
- INBUS® = reg. trademark of Acument GmbH & Co. OHG, 56567 Neuwied



Code	No.	mm	mm	mm
1953079	<b>6166-18</b>	223		1

### 6166-20

#### BICYCLE COMPACT TOOL 20 pieces

- Compact tool with 20 functions
- 2 separate tyre levers made from hard-wearing plastic
- Chain tool
- Box wrench 6, 11, 12 and open wrench 8, 10, 13, 15
- Screwdriver slotted / cross-slotted PH
- Spoke wrench G14, G15
- INBUS® wrench 2.5, 3, 4, 5, 6, 8
- Made from Vanadium Plus steel
- Dimensions: 94 x 40 x 35 mm
- INBUS® = reg. trademark of Acument GmbH & Co. OHG, 56567 Neuwied



Code	No.	mm	mm	mm
1888498	<b>6166-20</b>	235		1

### 6170-07

#### TOOL SET FOR BICYCLE 7 pieces



Code	No.	Contents	mm	mm
1888471	<b>6170-07</b>	1 handle No. 6160 1 fitting paring spanner No. 6161 1 fitting hexagon/octagon No. 6162 32 1 fitting hexagon/octagon No. 6162 36 1 fitting hexagon/octagon No. 6162 40 1 fitting open end spanner No. 6163 15 1 fitting hook spanner No. 6164	1400	1

### 8317

#### BOWDEN CABLE CUTTER

- For cutting wire rope up to 2 mm diameter and bowden-cable sleeves up to 5 mm diameter
- Crimping of bowden-cable sleeves and end-sleeves 1.5 mm and 2 mm
- For medium hard wire
- With opening spring, transport lock and width adjustment
- Induction-hardened cutting edges
- Innovative GEDORE cutting form produces a precision cut
- Low overall weight



Code	No.	mm	mm	mm
2011638	<b>8317-160 JC</b>	170	150	1



## Torque wrenches and accessories



230  
-  
287



**INDUSTRIAL CUTLERY**

- ✔ Cutlery is traditionally not made from tempering steel, but from plain carbon steel. Carbon steel is not stainless, but keeps its sharpness longer than stainless steel.
- ✔ All GEDORE scissors are hot, drop-forged.
- ✔ Precisely machined and hardened/tempered.
- ✔ The cutting-edge is manually ground
- ✔ Carbon steel, professional hardening/tempering and the hand-ground cutting edge ensure an optimum cut and cutting-sharpness longevity.

Please ask for our detailed priced leaflet!

**SCISSORS**

**1104**

**CRAFTSMAN SCISSORS**

- ✔ Outstanding cutting performance
- ✔ Suitable for textiles, rubber, wallpaper, plastic, etc.
- ✔ Forged, resharpenable
- ✔ Adjuster screw for later adjustment
- ✔ Fine-polished C45 carbon steel, varnished eyes, silicone dipped RAL 5015
- ✔ Chrome-plated
- ✔ Version L = for left-handers



Code	No.	(mm)	mm	mm
9118280	<b>1104-18</b>	180	142	5
9118360	<b>1104-20</b>	200	248	5
2082292	<b>1104-20L</b>	200	248	5
9118440	<b>1104-23</b>	230	300	5
9118520	<b>1104-26</b>	260	378	5
2082306	<b>1104-26L</b>	260	378	5
9118600	<b>1104-29</b>	290	446	5
9118790	<b>1104-32</b>	320	536	5

**1114**

**LEATHER SCISSORS**

- ✔ Ideal for all kind of leather
- ✔ 9" serrated section
- ✔ Adjuster screw for later adjustment
- ✔ Fine-polished C45 carbon steel, varnished eyes, silicone dipped RAL 5015
- ✔ Chrome-plated



Code	No.	(mm)	mm	mm
9118950	<b>1114-23</b>	230	282	5

**1277**

**INDUSTRIAL SCISSORS PROFESSIONAL**

- ✔ With two equal eyes
- ✔ For universal use
- ✔ Hand-ground
- ✔ Adjuster screw for later adjustment
- ✔ Fine-polished C45 carbon steel
- ✔ Chrome-plated



Code	No.	(mm)	mm	mm
9119680	<b>1277-10</b>	100	23	5
9119760	<b>1277-12</b>	120	40	5
9119840	<b>1277-16</b>	160	61	5
9119920	<b>1277-18</b>	180	88	5

**1350**

**INDUSTRIAL SCISSORS PROFESSIONAL**

- ✔ One large and one small eye for higher transmission of force
- ✔ For universal use
- ✔ Hand-ground
- ✔ Adjuster screw for later adjustment
- ✔ Fine-polished carbon steel
- ✔ Chrome-plated
- ✔ Version L = for left-handers



Code	No.	(mm)	mm	mm
9120770	<b>1350-16</b>	160	70	5
9120850	<b>1350-18</b>	180	94	5
2082314	<b>1350-18L</b>	180	94	5
9120930	<b>1350-20</b>	200	132	5

**2123**

**PAPER SCISSORS**

- ✔ With two equal eyes
- ✔ Suitable for the paper-processing industry and also for wallpapering and use in offices and warehouses
- ✔ Fine-polished C45 carbon steel
- ✔ Chrome-plated



Code	No.	(mm)	mm	mm
9123790	<b>2123-26</b>	260	178	5



**8250 • 8315**



**315  
316**



### 52887 TE - 55108 TE

#### SPECIAL SCISSORS

- ▶ Ideal for Kevlar®, aramid and glass fibre
- ▶ Extra hard blades, outside Teflon-coated, inside chrome-plated
- ▶ Fine-serrated on one side
- ▶ Pointed execution
- ▶ Plastic-coated handles
- ▶ Version L = for left-handers
- ▶ Kevlar® is a registered trademark of the company DuPont



Code	No.	l (mm)	h (mm)	U
8017730	<b>52887 TE-V-210</b>	210	252	1
8017750	<b>52887 TE-V-260</b>	260	420	1
2082381	<b>52887 TE-V-320</b>	320	622	1
2082403	<b>52999 TE-V-260L</b>	260	360	1
2082330	<b>53791 TE-V-210</b>	210	272	1
2082373	<b>55108 TE-V-130</b>	130	62	1

### 8096

#### SMALL UNIVERSAL SCISSORS

- ▶ With insulation stripping slot
- ▶ Nickel-plated, with blue handle protectors



Code	No.	l (mm)	h (mm)	U
6707900	<b>8096-140</b>	140	75	1



## KNIVES

### 0021

#### POCKET KNIFE

- ▶ Traditional working knife
- ▶ Folding
- ▶ Universal use
- ▶ Extremely sharp
- ▶ C75 carbon steel blade
- ▶ Weatherproof hardwood handle



Code	No.	l (mm)	h (mm)	U
2016737	<b>0021-07</b>	70	57	10

### 0038

#### POCKET KNIFE

- ▶ Anchor or dinghy knife for heavy-duty use
- ▶ Folding
- ▶ Universal use
- ▶ Extremely sharp
- ▶ C75 carbon steel blade
- ▶ Weatherproof hardwood handle



Code	No.	l (mm)	h (mm)	U
9100580	<b>0038-08</b>	80	86	10

### 0042

#### CABLE KNIFE

- ▶ With wire stripper
- ▶ Folding
- ▶ Universal use
- ▶ Extremely sharp
- ▶ C75 carbon steel blade
- ▶ Weatherproof hardwood handle



Code	No.	l (mm)	h (mm)	U
9100660	<b>0042-09</b>	90	76	10

### 0047

#### POCKET KNIFE

- ▶ With extremely wide blade for heavy-duty use
- ▶ Folding
- ▶ Universal use
- ▶ Extremely sharp
- ▶ C75 carbon steel blade
- ▶ Weatherproof hardwood handle



Code	No.	l (mm)	h (mm)	U
9100740	<b>0047-07</b>	70	64	10
9100900	<b>0047-75</b>	75	86	10
9100820	<b>0047-08</b>	80	98	10

### 0056

#### POCKET KNIFE

- ▶ Traditional working knife
- ▶ Folding
- ▶ Universal use
- ▶ Extremely sharp
- ▶ C75 carbon steel blade
- ▶ Plastic handle



Code	No.	l (mm)	h (mm)	U
9101040	<b>0056-07</b>	70	66	10






**0063**

**CABLE KNIFE**

- ✔ With wire stripper
- ✔ Folding
- ✔ Universal use
- ✔ Extremely sharp
- ✔ X46Cr13 stainless steel blade
- ✔ Plastic handle






Code	No.			
9101200	<b>0063-08</b>	80	92	10

**0059 - 0067**

**POCKET KNIFE**

- ✔ Traditional working knife
- ✔ Folding
- ✔ Universal use
- ✔ Extremely sharp
- ✔ C75 carbon steel blade
- ✔ Weatherproof hardwood handle






Code	No.			
9101470	<b>0067-07</b>	70	61	10
9101390	<b>0065-09</b>	90	78	10
9101120	<b>0059-10</b>	100	102	10

**0117**

**WORK KNIFE**

- ✔ Ideal as a packaging, boxing, warehousing or paper knife
- ✔ Extremely sharp
- ✔ C75 carbon steel blade
- ✔ Beech handle



Code	No.			
9102520	<b>0117-10</b>	100	70	10
9102600	<b>0117-12</b>	120	80	10
9102790	<b>0117-16</b>	160	106	10
9102870	<b>0117-18</b>	180	110	10

**0246**

**INDUSTRIAL KNIFE**

- ✔ Wide blade with straight back
- ✔ Extremely sharp
- ✔ C75 carbon steel blade
- ✔ Beech handle






Code	No.			
9106860	<b>0246-16</b>	160	98	10

**0291**

**UNIVERSAL KNIFE**

- ✔ Universal use
- ✔ Extremely sharp
- ✔ C75 carbon steel blade
- ✔ Beech handle




Code	No.			
9107910	<b>0291-06</b>	60	175	37

**0365**

**UNIVERSAL KNIFE**

- ✔ Stainless steel
- ✔ Handle made from cherrywood



Code	No.			
9109290	<b>0365-07</b>	70	39	10

**0513**

**CABLE KNIFE**

- ✔ With wire stripper
- ✔ Folding
- ✔ Universal use
- ✔ Extremely sharp
- ✔ C70 carbon steel blade
- ✔ Weatherproof hardwood handle



Code	No.			
9113050	<b>0513-09</b>	90	80	10



**S 8140 A**



**338**





4522

**ELECTRICIANS' CABLE KNIFE**

- ▶ With wire stripper
- ▶ Folding blade
- ▶ Rosewood-faced handle



Code	No.	85	195	75	10
6690240	<b>4522</b>				



**SCRAPERS**

0175

**SCRAPER**

- ▶ Stamped blade
- ▶ Fine-polished, flexible C75 carbon steel
- ▶ Glazed beech handle
- ▶ Blade width 30 - 120 mm



Code	No.	W	66	10
9103840	<b>0175-03</b>	30	66	10
9103920	<b>0175-04</b>	40	68	10
9104060	<b>0175-05</b>	50	72	10
9104140	<b>0175-06</b>	60	80	10
9104220	<b>0175-08</b>	80	90	10
9104300	<b>0175-10</b>	100	110	10
9104490	<b>0175-12</b>	120	120	10



0179

**SCRAPER**

- ▶ Professional version
- ▶ Fully forged
- ▶ Fine-polished, flexible C50 carbon steel
- ▶ Weatherproof hardwood handle
- ▶ Handle width 30 - 120 mm



Code	No.	W	47	10
9104570	<b>0179-03</b>	30	47	10
9104650	<b>0179-04</b>	40	63	10
9104730	<b>0179-06</b>	60	84	10
9104810	<b>0179-08</b>	80	120	10
2016745	<b>0179-10</b>	100	132	10
9105110	<b>0179-12</b>	120	144	10

6951

**SAFETY KNIFE**

- ▶ Ideal for the logistics sector
- ▶ Wave-ground carbon steel blade
- ▶ Blade-shield to protect user from cuts
- ▶ Concealed safety foil blade, cuts only when the blue slider is pressed
- ▶ Polyamide handle



Code	No.	Description	150	1
2082411	<b>6951-00</b>	Safety knife	150	1
2082438	<b>6951-20</b>	Wave-ground blade	40	1
2082446	<b>6951-50</b>	Dispenser with 10 foil blades	63	1



VDE 4522 • 4527




515





# CAST IRON SCREW CLAMPS

## FOR DIRECT, SECURED CLAMPING

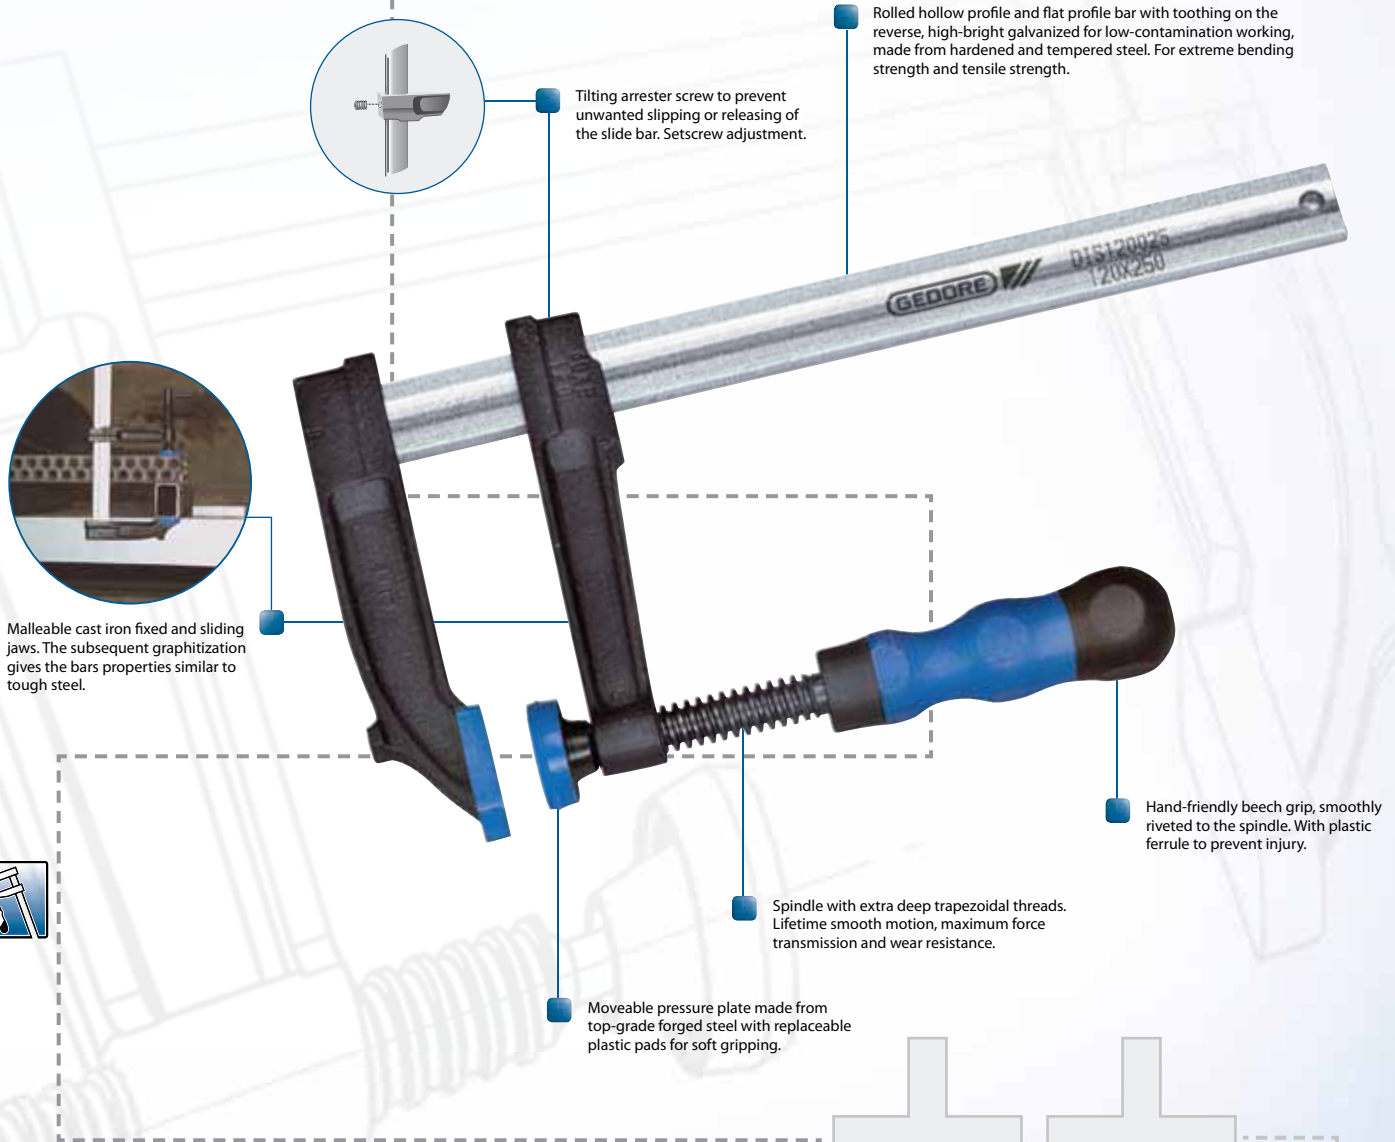

**Roller hollow profile and flat profile bar with toothing on the reverse, high-bright galvanized for low-contamination working, made from hardened and tempered steel. For extreme bending strength and tensile strength.**

**Tilting arrester screw to prevent unwanted slipping or releasing of the slide bar. Setscrew adjustment.**

**Malleable cast iron fixed and sliding jaws. The subsequent graphitization gives the bars properties similar to tough steel.**

**Hand-friendly beech grip, smoothly riveted to the spindle. With plastic ferrule to prevent injury.**

**Spindle with extra deep trapezoidal threads. Lifetime smooth motion, maximum force transmission and wear resistance.**

**Moveable pressure plate made from top-grade forged steel with replaceable plastic pads for soft gripping.**

### CLAMPING PLATES FOR SCREW CLAMPS

- ✔ Clamping plates for difficult edges and surfaces
- ✔ Universal size = suitable for all screw clamps
- ✔ With magnetic holder





## CAST IRON SCREW CLAMPS

### DIS

#### CAST IRON SCREW CLAMP with wooden handle

- ▶ To DIN 5117
- ▶ Professional clamp for universal use
- ▶ With strong profile-section bar in special steel and rear toothing
- ▶ Pressure plate with exchangeable protective cap
- ▶ Deep trapezoidal thread for optimum transfer of force
- ▶ Clamping arms in sturdy malleable cast iron, with torsionally-resistant H-section
- ▶ With fixing screw for fine adjustment of pressure
- ▶ With beech wood handle



Code	No.	mm [2]	mm [3]	mm [4]	mm [5]
1068849	<b>DIS080016</b>	80	160	25 x 6	0.7
1068938	<b>DIS100020</b>	100	200	30 x 8	1.3
1068989	<b>DIS120025</b>	120	250	30 x 8	1.7
1068997	<b>DIS120030</b>	120	300	30 x 8	1.8
1069004	<b>DIS120040</b>	120	400	30 x 8	2.2
1069012	<b>DIS120050</b>	120	500	30 x 8	2.3
1069020	<b>DIS120060</b>	120	600	30 x 8	2.4
1069039	<b>DIS120080</b>	120	800	30 x 8	2.8
1069047	<b>DIS120100</b>	120	1000	30 x 8	2.7
1401173	<b>DIS120125</b>	120	1250	35 x 11	3.2
1401181	<b>DIS120150</b>	120	1500	35 x 11	3.5
1401203	<b>DIS120200</b>	120	2000	35 x 11	4.5

### DIN

#### CAST IRON SCREW CLAMP with wooden handle

- ▶ To DIN 5117
- ▶ Heavy-duty professional clamp for hard, everyday use
- ▶ Strong flat steel bar with rear toothing
- ▶ Pressure plate with exchangeable protective cap
- ▶ Deep trapezoidal thread for optimum transfer of force
- ▶ Clamping arms in sturdy malleable cast iron, with torsionally-resistant H-section
- ▶ With fixing screw for fine adjustment of pressure
- ▶ With beech wood handle



Code	No.	mm [2]	mm [3]	mm [4]	mm [5]
1170937	<b>DIN050100</b>	50	100	15 x 5	0.3
1171062	<b>DIN060120</b>	65	120	20 x 5	0.6
1171070	<b>DIN060200</b>	65	200	20 x 5	0.6
1171097	<b>DIN060300</b>	65	300	20 x 5	0.7
1069462	<b>DIN140030</b>	140	300	35 x 9	2.2
1069470	<b>DIN140040</b>	140	400	35 x 9	2.5
1069527	<b>DIN175040</b>	175	400	35 x 9	2.7
1069276	<b>DIN121050</b>	120	500	35 x 11	3.0
1069284	<b>DIN121060</b>	120	600	35 x 11	3.3
1069292	<b>DIN121080</b>	120	800	35 x 11	3.9
1069306	<b>DIN121100</b>	120	1000	35 x 11	4.5
1069314	<b>DIN121120</b>	120	1200	35 x 11	5.1
1069322	<b>DIN121150</b>	120	1500	35 x 11	5.9

### DISB

#### CAST IRON SCREW CLAMP with tommy bar

- ▶ For fast, strong clamping with sliding lever handle
- ▶ With strong profile-section bar in special steel and rear toothing
- ▶ Pressure plate with exchangeable protective cap
- ▶ Deep trapezoidal thread for optimum transfer of force
- ▶ Clamping arms in sturdy malleable cast iron, with torsionally-resistant H-section
- ▶ With fixing screw for fine adjustment of pressure
- ▶ With tommy bar with sliding lever handle



Code	No.	mm [2]	mm [3]	mm [4]	mm [5]
1069055	<b>DISB080016</b>	80	160	25 x 6	0.7
1069144	<b>DISB100020</b>	100	200	30 x 8	1.3
1069195	<b>DISB120025</b>	120	250	30 x 8	1.7
1069209	<b>DISB120030</b>	120	300	30 x 8	1.8
1069217	<b>DISB120040</b>	120	400	30 x 8	2.2
1069225	<b>DISB120050</b>	120	500	30 x 8	2.3
1069233	<b>DISB120060</b>	120	600	30 x 8	2.4
1069241	<b>DISB120080</b>	120	800	30 x 8	2.8
1069268	<b>DISB120100</b>	120	1000	30 x 8	3.2



### DINB

#### CAST IRON SCREW CLAMP with tommy bar

- ▶ For fast, strong clamping with sliding lever handle
- ▶ Strong flat steel bar with rear toothing
- ▶ Pressure plate with exchangeable protective cap
- ▶ Deep trapezoidal thread for optimum transfer of force
- ▶ Clamping arms in sturdy malleable cast iron, with torsionally-resistant H-section
- ▶ With fixing screw for fine adjustment of pressure
- ▶ With tommy bar with sliding lever handle



Code	No.	mm [2]	mm [3]	mm [4]	mm [5]
1069586	<b>DINB121050</b>	120	500	35 x 11	3.0
1069594	<b>DINB121060</b>	120	600	35 x 11	3.3
1069608	<b>DINB121080</b>	120	800	35 x 11	3.9
1069616	<b>DINB121100</b>	120	1000	35 x 11	4.5
1069624	<b>DINB121120</b>	120	1200	35 x 11	5.1
1069764	<b>DINB140030</b>	140	300	35 x 9	2.2






# ALL-STEEL SCREW CLAMPS +++

## FOR OPTIMUM FORCE TRANSMISSION

TGM, TGB, TGP, TGE all-steel screw clamps are primarily used in steel and vehicle construction. Particularly where heavy, sturdy parts need special clamping forces and a high degree of safety is essential.

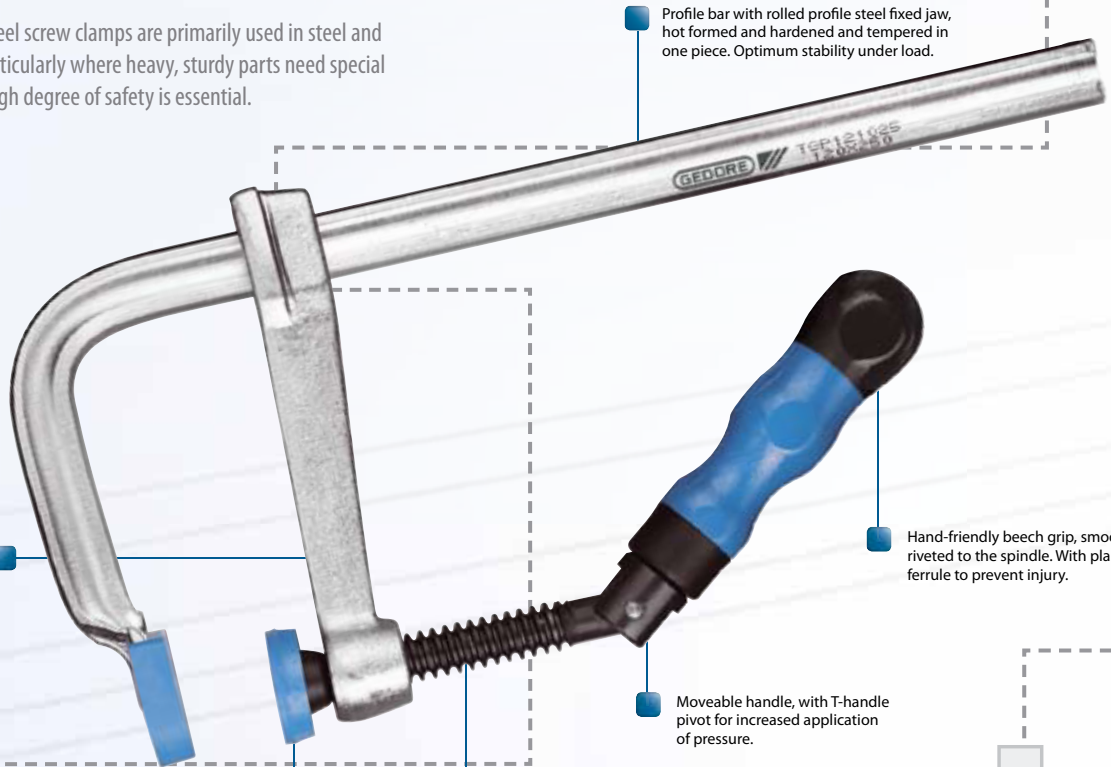

Forged, hardened and tempered steel sliding jaw. Hollow profile and flat profile bars with toothing on the reverse, high-bright galvanized for low contamination working.


Profile bar with rolled profile steel fixed jaw, hot formed and hardened and tempered in one piece. Optimum stability under load.

Hand-friendly beech grip, smoothly riveted to the spindle. With plastic ferrule to prevent injury.

Moveable handle, with T-handle pivot for increased application of pressure.

Spindle with extra deep trapezoidal threads. Lifetime smooth motion, maximum force transmission and wear resistance.

Moveable pressure plate made from top-grade forged steel with replaceable plastic pads for soft gripping.

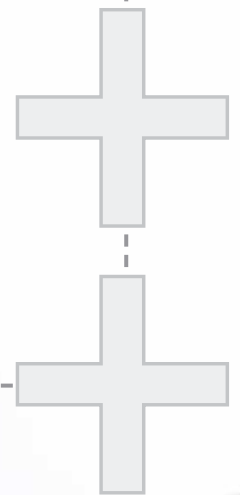

### CLAMPING PLATES FOR SCREW CLAMPS

#### DP 621

##### CLAMPING PLATES FOR SCREW CLAMPS

- ✔ Clamping plates for difficult edges and surfaces
- ✔ Universal size = suitable for all screw clamps
- ✔ With magnetic holder
- ✔ DP 621-1 With holding tips for uneven, smooth and slippery surfaces
- ✔ DP 621-2 With internal angle for external edges
- ✔ DP 621-3 With external angle for internal edges



Code	No.	Description	↕
1564714	DP 621-1	Clamping plate for holding tips	162
1564757	DP 621-2	Clamping plate with wedge	162
1564803	DP 621-3	Clamping plate with cone	162



## ALL-STEEL SCREW CLAMPS

### TGM

#### ALL-STEEL SCREW CLAMP with wooden handle

- For fast, strong clamping - with sliding lever handle
- With hollow-section bar and integral clamping arm
- In cold-drawn profile-section steel, hot-forged to shape and with optimum heat treatment guarantees torsion-free transference of the clamping force
- With forged clamping arm - fitted to slide perfectly
- Movable pressure plate with protective cap
- Deep trapezoidal thread for optimum transfer of force
- In special steel, hardened, bright zinc-plated - for good protection against corrosion and non-dirtying surface
- With beech wood handle



Code	No.	mm	mm	mm	mm
1070096	<b>TGM080016</b>	80	160	16 x 8	0.6
1070118	<b>TGM100020</b>	100	200	20 x 10	1.1
1070126	<b>TGM121025</b>	120	250	22 x 11	1.7
1070142	<b>TGM122030</b>	120	300	25 x 12	2.1
1070150	<b>TGM122040</b>	120	400	25 x 12	2.4
1070169	<b>TGM122050</b>	120	500	25 x 12	2.6
1070177	<b>TGM122060</b>	120	600	25 x 12	2.8
1070185	<b>TGM124080</b>	120	800	25 x 12	4.1
1070193	<b>TGM124100</b>	120	1000	25 x 12	4.7
1070207	<b>TGM124125</b>	120	1250	25 x 12	5.4
1070215	<b>TGM126150</b>	120	1500	25 x 12	7.6
1070134	<b>TGM140030</b>	140	300	25 x 12	2.3

### TGP

#### ALL-STEEL SCREW CLAMP with pivot handle

- For all variable uses requiring sensitivity and force
- The variable handle position permits a sensible combination of handle and tommy bar
- With hollow-section bar and integral clamping arm
- In cold-drawn profile-section steel, hot-forged to shape and with optimum heat treatment guarantees torsion-free transference of the clamping force
- With forged clamping arm - fitted to slide perfectly
- Movable pressure plate with protective cap
- Deep trapezoidal thread for optimum transfer of force
- In special steel, hardened, bright zinc-plated - for good protection against corrosion and non-dirtying surface
- With beech wood handle



Code	No.	mm	mm	mm	mm
1070460	<b>TGP121025</b>	120	250	22 x 11	1.7
1070479	<b>TGP122030</b>	120	300	25 x 12	2.1
1070541	<b>TGP140030</b>	140	300	25 x 12	2.1
1070487	<b>TGP122040</b>	120	400	25 x 12	2.4
1070495	<b>TGP122050</b>	120	500	25 x 12	2.6
1070509	<b>TGP122060</b>	120	600	25 x 12	2.8
1070517	<b>TGP124080</b>	120	800	28 x 14	4.1
1070525	<b>TGP124100</b>	120	1000	28 x 14	4.7
1070533	<b>TGP124125</b>	120	1200	28 x 14	5.4

### TGB

#### ALL-STEEL SCREW CLAMP with tommy bar

- For fast, strong clamping - with sliding lever handle
- With hollow-section bar and integral clamping arm
- In cold-drawn profile-section steel, hot-forged to shape and with optimum heat treatment guarantees torsion-free transference of the clamping force
- With forged clamping arm - fitted to slide perfectly
- Movable pressure plate with protective cap
- Deep trapezoidal thread for optimum transfer of force
- In special steel, hardened, bright zinc-plated - for good protection against corrosion and non-dirtying surface
- With tommy bar with sliding lever handle



Code	No.	mm	mm	mm	mm
1070223	<b>TGB080016</b>	80	160	16 x 8	0.6
1070231	<b>TGB100020</b>	100	200	20 x 10	1.1
1070258	<b>TGB121025</b>	120	250	22 x 11	1.7
1070274	<b>TGB122030</b>	120	300	25 x 12	2.1
1070282	<b>TGB122040</b>	120	400	25 x 12	2.4
1070290	<b>TGB122050</b>	120	500	25 x 12	2.6
1070304	<b>TGB122060</b>	120	600	25 x 12	2.8
1070312	<b>TGB124080</b>	120	800	28 x 14	4.1
1070320	<b>TGB124100</b>	120	1000	28 x 14	4.7
1070339	<b>TGB124125</b>	120	1250	28 x 14	5.4
1070266	<b>TGB140030</b>	140	300	25 x 12	2.3

## QUICK-RELEASE LEVER CLAMPS

### TGE

#### QUICK-RELEASE LEVER CLAMP

- For secure, high-pressure clamping, even using only one hand
- With hollow-section bar and integral clamping arm
- In cold-drawn profile-section steel, hot-forged to shape and with optimum heat treatment guarantees torsion-free transference of the clamping force
- High-gloss zinc-plated - for good protection against corrosion and non-dirtying surface
- With fine tooth and pawl mechanism for careful, fast clamping action and high force transference due to lever action
- The clamping force cannot be released or reduced by vibration
- With easy-grip powder-coated handle incorporating a release lever
- The movable clamping arm has a drop-forged, torsion-resistant profile section, and a precise mechanism for providing the highest clamping pressure



Code	No.	mm	mm	mm	mm
1070347	<b>TGE080016</b>	80	160	16 x 8	1.0
1070355	<b>TGE100020</b>	100	200	20 x 10	1.4
1070363	<b>TGE121025</b>	120	250	22 x 11	1.9
1070398	<b>TGE122030</b>	120	300	25 x 12	2.6
1070401	<b>TGE122040</b>	120	400	25 x 12	2.8
1070428	<b>TGE122050</b>	120	500	25 x 12	3.0
1070436	<b>TGE122060</b>	120	600	25 x 12	3.3
1070444	<b>TGE124080</b>	120	800	28 x 14	4.6
1070452	<b>TGE124100</b>	120	1000	28 x 14	5.2
1070371	<b>TGE140030</b>	140	300	25 x 12	2.8



**WORK LIGHTS**



- Work lights in industrial quality
- Protective jacket made of high quality rubber
- Protective tube made of polycarbonate or PMMA (also used for aircraft screens)



- GEDORE lamps are equipped with a Euro plug as per EN 50075 or with a shaped plug as per CEE 7/17
- Euro plugs can be used throughout Europe, except Britain, Ireland, Cyprus and Malta
- The particular geometry of the shaped plug allows the lamps to be used in more than 100 countries around the world
- International connectors and other connector variants are available on request



**Protection class I**

All electrically conductive parts of the equipment casing are connected to the equipment grounding conductor (earthing) system of the fixed electrical installation. Mobile or portable appliances with protection class I have a plug and socket connection with an equipment grounding contact, i.e. an earthing contact. The earthing connection is designed in such a way as to ensure that it is the first connection made, when the plug is inserted into the mains socket, and the last to be disconnected in the event of a fault. The power cable must be fitted with a mechanical strain-relief device at the point of entry into the equipment. If a fault occurs, in which a live conductor comes into contact with the casing, which is connected to earth, an earth contact is normally made, triggering the fuse and cutting the live power feed.



**Protection class II**

Equipment rated to protection class II has greater insulation or is double insulated, and is not connected to earth. This kind of safety measure is also referred to as protective insulation. Even if such equipment has electrically conductive surfaces, the increased level of insulation ensures that these surfaces are protected from coming into contact with live parts. Mobile or portable appliances with protection class II are not equipped with an earthed plug, that is to say: a three-pin plug is still used, but the earth pin is not connected.



**Protection class III**

Appliances rated to protection class III work with Safely Extra Low Voltage (SELV) and therefore need no explicit protection. Safely Extra Low Voltage (SELV) lamps are lamps rated at less than 50 V AC or 120 V DC, powered by a safety transformer as per DIN VDE 0551 (EN 60742) or by rechargeable or non-rechargeable batteries.

**900 51**

**HAND LAMP MINI 4**

- Power 4 W
- Operating voltage of charger 230 V AC/50 Hz
- Luminous flux 140 lm
- Protection class II
- Protection classification IP20
- T5 bulb; nor replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- Permitted ambient temperature of the operating field: -10 to +40° C
- With electronic ballast. The lamp starts without flickering thanks to the electronic ballast; gentle on the bulb
- With rotating suspension hook
- Flexible cable routing as a safeguard against cable fracture
- Hexagonal housing to stop any rolling away
- Euro plug with 5 metres cable
- LxWxH: 350x30x30 mm



Code	No.	↳mm↳	↕
2279754	<b>900 51</b>	350	470

**900 53**

**HAND LAMP STANDARD 8**

- Power 8 W
- Operating voltage 230 V AC/50 Hz
- Luminous flux 385 lm
- Protection class II
- Protection classification IP20
- T5 bulb; nor replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- Permitted ambient temperature of the operating field: -10 to +40° C
- With electronic ballast. The lamp starts without flickering thanks to the electronic ballast; gentle on the bulb
- With rotating suspension hook
- Flexible cable routing as a safeguard against cable fracture
- Hexagonal housing to stop any rolling away
- Euro plug with 5 metres cable
- LxWxH: 500x30x30 mm



Code	No.	↳mm↳	↕
2279770	<b>900 53</b>	500	490

**900 52 LED**

**HAND LAMP AKKU LED PRO**

- Rechargeable battery capacity 7.2 V DC/950 mAh
- Operating voltage of charger 230 V AC/50 Hz
- Protection class III
- Protection classification IP54
- Permitted ambient temperature of the operating field: -10 to +40° C
- 30 bright white LEDs
- Charging station with 12 V adapter for cigarette lighter and Euro plug
- Rechargeable battery Ni-MH, charging time 1.5 h
- Robust, high-grade housing
- Protection from rechargeable battery overloading and excessive voltage
- With rotating suspension hook
- LxWxH: 350x45x45 mm



Code	No.	↳mm↳	↕
2279711	<b>900 52 LED</b>	305	600

**900 54 LED****HAND LAMP PROFI QUICK 36 LED**

- Power 4.5 W
- Operating voltage 24 V DC
- Protection class III
- Protection classification IP54
- Permitted ambient temperature of the operating field: -10 to +40° C
- 36 bright white LEDs
- With rotating suspension hook
- Flexible cable routing as a safeguard against cable fracture
- Hexagonal housing to stop any rolling away
- Inside reflector; with prism protective tub
- Euro plug with 5 metres of cable
- LxWxH: 525x30x50 mm



Code	No.	mm	mm
2279797	<b>900 54 LED</b>	525	675

**900 58****HAND LAMP TRUCK 13**

- Power 13 W
- Operating voltage 230 V AC/50 Hz
- Luminous flux 830 lm
- Protection class II
- Protection classification IP54
- T5 bulb; G5 tube socket; replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- Permitted ambient temperature of the operating field: -10 to +40° C
- Robust aluminium inner profile
- With rotating suspension hook
- Shaped plug with 5 metres cable
- LxWxH: 800x33x33 mm



Code	No.	mm
2279800	<b>900 58</b>	755

**900 55****HAND LAMP COMPACT 11**

- Power 11 W
- Operating voltage 230 V AC/50 Hz
- Luminous flux 900 lm
- Protection class II
- Protection classification IP54
- PI bulb; G23 tube socket; replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- Permitted ambient temperature of the operating field: -10 to +40° C
- On/off switch
- Shaped plug with 5 metres cable
- LxWxH: 460x38x38 mm



Code	No.	mm
2279738	<b>900 55</b>	550

**900 59****HAND LAMP TRUCK 21**

- Power 21 W
- Operating voltage 230 V AC/50 Hz
- Luminous flux 1900 lm
- Protection class II
- Protection classification IP54
- T5 bulb; G5 tube socket; replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- Permitted ambient temperature of the operating field: -10 to +40° C
- Robust aluminium inner profile
- With rotating suspension hook
- Shaped plug with 5 metres cable
- LxWxH: 1140x33x33 mm



Code	No.	mm
2279827	<b>900 59</b>	

**900 56****HAND LAMP PROFI QUICK**

- Power 8 W
- Operating voltage 230 V AC/50 Hz
- Luminous flux 385 lm
- Protection class II
- Protection classification IP54
- T5 bulb; G5 tube socket; replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- Permitted ambient temperature of the operating field: -10 to +40° C
- With electronic ballast. The lamp starts without flickering thanks to the electronic ballast; gentle on the bulb
- With rotating suspension hook
- Flexible cable routing as a safeguard against cable fracture
- Hexagonal housing to stop any rolling away
- Inside reflector
- Shaped plug with 5 metres cable
- LxWxH: 550x33x33 mm



Code	No.
2279789	<b>900 56</b>

**900 60****ENGINE SPACE LAMP**

- Power 21 W
- Operating voltage 230 V AC/50 Hz
- Luminous flux 1900 lm
- Protection class II
- Protection classification IP54
- T5 bulb; G5 tube socket; replaceable
- Luminous paint: bright white, colour temperature 4000 Kelvin
- With anti-shatter foil
- Permitted ambient temperature of the operating field: -10 to +40° C
- Dazzle-free lighting of the entire operating area
- Flexible quick-clamp device extendable from 115 - 190 cm
- Fully rubber-protected clamp for trouble-free and rapid fastening
- From aluminium
- Shaped plug with 10 metres cable
- LxWxH: 1140x33x33 mm



Code	No.	mm
2279746	<b>900 60</b>	2700



**H 900 60**

**TELESCOPIC BONNET SUPPORT**

- ✔ Flexible quick-clamp device extendable from 115 - 190 cm
- ✔ Fully rubber-protected clamp for trouble-free and rapid fastening
- ✔ From aluminium
- ✔ Spare part for no. 900 60



Code	No.
2279762	<b>H 900 60</b>

**H 900**

**MAGNETIC HOLDER**

- ✔ Magnetic system in flat pattern
- ✔ Housing zinc-plated
- ✔ Temperature of use up to 200° C



Code	No.	Tensile force kp	Adhesive force N	Ø
2279819	<b>H 900 01</b>	25	245	50
2279843	<b>H 900 02</b>	28	275	63

**900 61**

**HAND LAMP PRO AKKU DUO LED**

- ✔ Rechargeable battery capacity 3.7 V DC/2400 mAh
- ✔ Operating voltage of charger 230 V AC/50 Hz
- ✔ Protection class II
- ✔ Protection classification IP68
- ✔ Permitted ambient temperature of the operating field: -10 to +40° C
- ✔ 3 bright-white LEDs with a minimum 50,000 h service life
- ✔ With a 80° angle of reflected beam, illuminates a four-fold larger working angle than comparable LED inspection lamps
- ✔ Three-fold greater light efficiency than comparable LED inspection lamps
- ✔ Charging unit with euro plug
- ✔ Li-polymer rechargeable battery; max. operating time 4 h
- ✔ Contact-free induction charge, charging time 4 h
- ✔ Break-proof housing



Code	No.
2288672	<b>900 61</b>

**901 57**

**WORKLAMP MEGA POWER 72**

- ✔ Power 2x 36 W
- ✔ Operating voltage 230 V AC/50 Hz
- ✔ Luminous flux 5600 lm
- ✔ Protection class I
- ✔ Protection classification IPX4
- ✔ PL bulb; 2G10 bulb socket; replaceable
- ✔ Luminous paint: bright white, colour temperature 4000 Kelvin
- ✔ Permitted ambient temperature of the operating field: -10 to +40° C
- ✔ 2 on/off switches for separate control
- ✔ 2 CEE pattern power points
- ✔ Adjustable support bracket
- ✔ Special reflector
- ✔ Can be mounted on tripod stand ST 901 57 (order separately)
- ✔ Shaped plug with 5 metres cable
- ✔ Dimensions: L 320 x W 320 X H 140 mm



Code	No.	312
2279835	<b>901 57</b>	3852

**901 58****WORKLAMP POWER**

- ▶ Power 2x 18 W
- ▶ Operating voltage 230 V AC/50 Hz
- ▶ Luminous flux 2400 lm
- ▶ Protection class II
- ▶ Protection classification IP44
- ▶ PL bulb; 2G10 bulb socket; replaceable
- ▶ Luminous paint: bright white, colour temperature 4000 Kelvin
- ▶ Permitted ambient temperature of the operating field: -10 to +40° C
- ▶ 2 on/off switches for separate control
- ▶ Adjustable support bracket
- ▶ Shaped plug with 5 metres cable
- ▶ Dimensions: L 350 x W 335 X H 230 mm



Code	No.
2288680	<b>901 58</b>

**ST 901 57****TRIPOD STAND, ZINC-PLATED**

- ▶ For worklamp no. 901 57
- ▶ Height-adjustable between 1.1 m to 2.7 m
- ▶ Base stand retractable
- ▶ Incl. fixing screws for height adjustment
- ▶ Fully zinc-plated



Code	No.	↳ mm ↳
2279851	<b>ST 901 57</b>	6500

**LM 900 08****SPARE BULB 8 W**

- ▶ Power 8 W
- ▶ Luminous flux 385 lm
- ▶ For tube socket G5
- ▶ Luminous paint: bright white, colour temperature 4000 Kelvin
- ▶ For hand light Profi Quick 900 56

Code	No.	↳ mm ↳	Ø
2279878	<b>LM 900 08</b>	288	16

**LM 900 13****SPARE BULB 13 W**

- ▶ Power 13 W
- ▶ Luminous flux 830 lm
- ▶ For tube socket G5
- ▶ Luminous paint: bright white, colour temperature 4000 Kelvin
- ▶ Spare bulb for Worklamp Truck 900 58

Code	No.	↳ mm ↳	Ø
2279886	<b>LM 900 13</b>	517	16

**LM 900 21****SPARE BULB 21 W**

- ▶ Power 21 W
- ▶ Luminous flux 1900 lm
- ▶ For tube socket G5
- ▶ Luminous paint: bright white, colour temperature 4000 Kelvin
- ▶ Spare bulb for Worklamp Truck 900 59

Code	No.	↳ mm ↳	Ø
2279894	<b>LM 900 21</b>	849	16.0

**LM 900 21 S****SPARE BULB 21 W FOR 900 60**

- ▶ Power 21 W
- ▶ Luminous flux 1900 lm
- ▶ For tube socket G5
- ▶ Luminous paint: bright white, colour temperature 4000 Kelvin
- ▶ With anti-shatter foil
- ▶ Spare bulb for engine space lamp no. 900 60

Code	No.	↳ mm ↳	Ø	
2329921	<b>LM 900 21 S</b>	849	16.0	<b>78.49</b>

**LM 900 36****SPARE BULB 2X 36 W**

- ▶ Power 36 W
- ▶ Luminous flux 2800 lm
- ▶ Für bulb type PL
- ▶ For bulb socket 2G10
- ▶ Luminous paint: bright white, colour temperature 4000 Kelvin
- ▶ Spare bulb for Worklamp Mega Power no. 901 57
- ▶ EVG

Code	No.
2279908	<b>LM 900 36</b>




**SAFETY AT WORK**

**TOOL BAGS**

**WT 1056 1**

- HEAVY-DUTY BELT WITH CUSHION**
- ✔ Fits waist size from 80-120 cm (32"-48")
  - ✔ Strongly cushioned for maximum comfort
  - ✔ Made from leather



Code	No.	L	W	
1802410	<b>WT 1056 1</b>	1330	145	450



**WT 1056 2**

- UNIVERSAL POUCH**
- ✔ Leather pocket for knives
  - ✔ Hammer holder with metal hooks
  - ✔ Hook for tape measure




Code	No.	W	H	
1811096	<b>WT 1056 2</b>	290	290	340

**WT 1056 3**

- DRILL HOLSTER**
- ✔ Suitable for drill-machines and battery-drills
  - ✔ With pockets for screws and bits
  - ✔ Securing loop as loss-proof




Code	No.	W	H	
1818147	<b>WT 1056 3</b>	210	320	150

**WT 1056 4**

- HAMMER HOLDER WITH METAL HOOKS**
- ✔ Holds any claw hammer at a comfortable angle
  - ✔ Enables boundless freedom of movement
  - ✔ Polyester and blue suede
  - ✔ Stainless tab



Code	No.	W	H	
1818155	<b>WT 1056 4</b>	100	160	100

**WT 1056 5**

- THREE-POUCH BELT SET**
- ✔ Fits waist size from 80-120 cm (32"-48")
  - ✔ 4 holsters, 5 storage pockets and 1 eyelet for tape measure



Code	No.	W	H	
1818163	<b>WT 1056 5</b>	690	270	750



### WT 1056 6

#### ELECTRICIANS' POUCH

- Generous pouch space
- 8 pockets for screwdrivers
- Extra pocket for insulation stripping knife
- Holding shackle for insulating tape



Code	No.	W	H	→
1818171	<b>WT 1056 6</b>	240	320	500

### WT 1056 7

#### HEAVY-DUTY BELT SET

- Heavily padded belt for superior comfort when fully loaded
- Fits waist size from 80-120 cm (32"-48")
- Basic belt from leather
- All inclusive: Holster, hammer holder, 2 pockets and mobile phone holder (available separately WT 1056 7-1)



WT 10567-1



Code	No.	(mm)	→
1818198	<b>WT 1056 7</b>	1330	1600
1963171	<b>WT 1056 7-1</b>		52

### WT 1056 8

#### DUO POUCH

- Leather pocket for knives
- 2 large storage pockets



Code	No.	W	H	→
1818201	<b>WT 1056 8</b>	240	280	360

### WT 1056 9

#### ROLL-COVER

- With 12 inside pockets for slim tools, e.g. combination spanners or screwdrivers
- Delivery without tools



Code	No.	W	H	→
1818228	<b>WT 1056 9</b>	320	350	120

### WT 1056 10

#### KNEE PADS, PAIR

- Made of strong synthetic leather with rubber
- Soft lining for comfortable kneeling
- Hook and loop fastener
- Universal size



Code	No.	→
1818236	<b>WT 1056 10</b>	200








**WT 1056 11**

**TOOL RUCKSACK PROFI**

- ✔ With extra large capacities
- ✔ Practical and ergonomic arrangement of the internal and external pockets
- ✔ Ideal for transport and storage of tools, accessories and documents
- ✔ Strong zippers
- ✔ Reinforced back, padded adjustable shoulder straps and additional practical handle on the top
- ✔ Tear-resistant polyester fabric with 3M reflective stripes, suede
- ✔ Spray-water repellent, resistant to chemical agents
- ✔ Inured to temperature changes
- ✔ The 3M reflective stripes provide high visibility and extra safety




Code	No.	W	H	D	
1818244	<b>WT 1056 11</b>	300	400	120	2800

**WT 1056 12**

**TOOL RUCKSACK SOFT**

- ✔ SOFT rucksack, extremely light and yet strong
- ✔ Tear-resistant polyester fabric and suede
- ✔ Strong and watertight
- ✔ Practical and ergonomic arrangement of the internal and external pockets
- ✔ Ideal for transport and storage of tools, accessories and documents
- ✔ Strong zippers
- ✔ Padded adjustable shoulder straps and additional practical handle on the top
- ✔ Delivery without tools



Code	No.	W	H	D	
1818252	<b>WT 1056 12</b>	380	410	70	1900

**WT 1056 13**

**TOOL VEST**

- ✔ Multifunctional tool vest with many pockets and holsters
- ✔ Universal size with 4 lateral buckles
- ✔ Padded pouches of different dimensions for tools and small components
- ✔ Mobile phone holder and reinforced tab to hang a hammer
- ✔ Wide back pouch
- ✔ Net insert in the back for a better transpiration
- ✔ Compartment with window for an identity card
- ✔ Tear-resistant polyester fabric with 3M reflective stripes, suede
- ✔ Spray-water repellent, resistant to chemical agents
- ✔ Inured to temperature changes
- ✔ Delivery without tools



Code	No.	W	H	
1818260	<b>WT 1056 13</b>	480	660	1000



## SAFETY AT WORK

923

### SAFETY SPECTACLES

- GEDORE safety spectacles with UVEX technology as per DIN EN 166:2006
- Uncompromising safety, design and wearer comfort for continuous wear
- Optimum adjustment to the facial features by individually adjustable arms and lens tilt. Additional skin-friendly soft-component pads moulded to the sensitive contact areas on the nose, ears and temple
- Scratchproof, mist-proof coated lenses with "NanoClean" effect ensure clear vision and are easy to clean
- Advantages of the different lens colours (availability depends on model):
  - No. 923-1 colourless: 100% protection against UVA, UVB and UVC radiation as per DIN EN 166 and DIN EN 170
  - No. 923-2 blue: 100% protection against UV radiation (UVA, UVB, UVC)
- Complies with DIN EN 172 requirements for the perception of signal colours.
- A slight bluish tint gives a very soothing effect on the human eye, aiding relaxed vision.
- Suitable for all workplaces - without colour check.
- Supplied in a black nylon bag



Code	No.	Execution	↕	📦
1959468	<b>923-1</b>	clear	40	1
1959484	<b>923-2</b>	blue	40	1



924

### EAR PLUGS WITH HEAD BAND

- Universal size
- Ideal for off-site and short-term deployments
- Designed for continuous noise up to 95 dB and pulsed noise up to 100 dB
- Secure-fit headband design
- The convex shape of the ear plugs allows them to be hygienically set down with no contact between the ear plugs and the rest
- Lightweight - just 8 g
- Signal yellow replacement plugs E-924, easy to fit, 5 pairs, hygienically packed



Code	No.	↕	📦
1959646	<b>924</b>	80	10
1959751	<b>E-924</b>	20	1



## WORK GLOVES

920

### WORK GLOVES FASTFIT

- For universal use
- Close fitting for retention of feel and dexterity
- Stage 5 classification as per EN 420/03 (scale from 0 - 5)
- Kind on the skin
- Rugged imitation leather and synthetic material



Code	No.	Size	↕	📦
1938576	<b>920 8</b>	S/8	70	1
1938584	<b>920 9</b>	M/9	70	1
1938592	<b>920 10</b>	L/10	80	1
1938606	<b>920 11</b>	XL/11	80	1
1938614	<b>920 12</b>	XXL/12	80	1

921

### WORK GLOVES ORIGINAL

- For heavy duty use
- Close fitting for retention of feel and dexterity
- Stage 5 classification as per EN 420/03 (scale from 0 - 5)
- Rubber reinforced finger tips
- Adjustable Velcro fasteners on the cuffs
- Rugged imitation leather and synthetic material



Code	No.	Size	↕	📦
1938622	<b>921 5</b>	XXXS/5	70	1
1938630	<b>921 6</b>	XXS/6	70	1
1938649	<b>921 7</b>	XS/7	70	1
1938657	<b>921 8</b>	S/8	70	1
1938665	<b>921 9</b>	M/9	80	1
1938673	<b>921 10</b>	L/10	80	1
1938681	<b>921 11</b>	XL/11	90	1
1938703	<b>921 12</b>	XXL/12	90	1
1938711	<b>921 13</b>	XXXL/13	90	1

922

### WORK GLOVES M-PACT

- For heavy duty use
- Close fitting for retention of feel and dexterity
- Stage 5 classification as per EN 420/03 (scale from 0 - 5)
- Rubber reinforced finger tips
- Adjustable Velcro fasteners on the cuffs
- Additional knuckle protectors
- Ergonomic palm reinforcement
- Rugged imitation leather and synthetic material



Code	No.	Size	↕	📦
1938738	<b>922 8</b>	S/8	80	1
1938746	<b>922 9</b>	M/9	80	1
1938754	<b>922 10</b>	L/10	80	1
1938762	<b>922 11</b>	XL/11	90	1
1938770	<b>922 12</b>	XXL/12	90	1